


		49	43	32
DISPLAY	Inch	49"	43"	32"
	Backlight Type	LED (Direct)	LED (Direct)	LED (Direct)
	Resolution	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)	1,366 x 768 (HD)
	Brightness (cd/m ²)	400	400	240
	Dynamic Contrast Ratio (Dynamic MCI (Hz))	1,000,000:1	1,000,000:1	1,000,000:1
	Static (Panel) Contrast Ratio	1,100:1	1,200:1	1,200:1
	Viewing Angle Degree	178 x 178	178 x 178	178 x 178
	Response Time (G to G, ms)	9	9	9
BROADCASTING SYSTEM	Analog	• (PAL/SECAM)	• (PAL/SECAM)	• (PAL/SECAM)
	Digital	DVB-T2/C/S2	DVB-T2/C/S2	DVB-T2/C/S2
	XD Engine	•	•	•
VIDEO	Aspect Ratio	• 6 modes (16:9, Original, Full wide, 4:3, Vertical Zoom, All-Direction Zoom)	• 6 modes (16:9, Original, Full wide, 4:3, Vertical Zoom, All-Direction Zoom)	• 6 modes (16:9, Original, Full wide, 4:3, Vertical Zoom, All-Direction Zoom)
	Audio Output	10 W + 10 W	10 W + 10 W	5 W + 5 W
AUDIO	Speaker System	2.0 ch	2.0 ch	2.0 ch
	Sound Mode	• 6 modes (Standard, Cinema, Clear Voice, Sports, Music, Game)	• 6 modes (Standard, Cinema, Clear Voice, Sports, Music, Game)	• 6 modes (Standard, Cinema, Clear Voice, Sports, Music, Game)
	Clear Voice	• (Clear Voice)	• (Clear Voice)	• (Clear Voice)
	Solution Type	Pro:Centric V, Quick Menu 2.0	Pro:Centric V, Quick Menu 2.0	Pro:Centric V, Quick Menu 2.0
HOSPITALITY SOLUTION	Data Streaming (IP & RF)	• (RF Only)	• (RF Only)	• (RF Only)
	RF	• (1 Tuner)	• (1 Tuner)	• (1 Tuner)
	HCAP (SDK)	GEM / Flash	GEM / Flash	GEM / Flash
	Pro:Centric Application	PCA 3.8	PCA 3.8	PCA 3.8
HOSPITALITY FEATURES		Hotel Mode, Lock Mode (Limited), Welcome Video / Screen, Insert Image, One Channel Map, External Speaker Out, RJP Interface, RJP Compatibility, USB Auto playback, Auto Off / Sleep Timer, Smart Energy Saving, Motion Eye Care, Time Scheduler		
JACK INTERFACE	Set Side	HDMI In, USB 2.0, CI Slot, Headphone Out	HDMI In, USB 2.0, CI Slot, Headphone Out	HDMI In, USB 2.0, CI Slot, Headphone Out
	Set Rear	RF In (2), AV In, Component In (RCA5 Type), Digital Audio Out (Optical), HDMI / HDCP Input, RGB In, PC Audio Input, RS-232C (Control & Service), RJ45, External Speaker Out	RF In (2), AV In, Component In (RCA5 Type), Digital Audio Out (Optical), HDMI / HDCP Input, RGB In, PC Audio Input, RS-232C (Control & Service), RJ45, External Speaker Out	RF In (2), AV In, Component In (RCA5 Type), Digital Audio Out (Optical), HDMI / HDCP Input, RGB In, PC Audio Input, RS-232C (Control & Service), RJ45, External Speaker Out
DIMENSION (UNIT : MM)	Vesa	300 x 300	200 x 200	200 x 200
	W x H x D / Weight (with stand)	1,110 x 705 x 303 / 14.5kg	977 x 630 x 303 / 11.2kg	739 x 495 x 241 / 6.05kg
	W x H x D / Weight (without stand)	1,110 x 650 x 81.1 / 11.3kg	977 x 575 x 80.8 / 8.0kg	739 x 441 x 84 / 4.85kg
	W x H x D / Weight (Packing)	1,296 x 770 x 171 / 17.2kg	1,147 x 660 x 175 / 13.9kg	905 x 530 x 162 / 7.35kg
POWER (UNIT : WATTS)	Voltage, Hz	100 ~ 240V, 50/60Hz	100 ~ 240V, 50/60Hz	100 ~ 240V, 50/60Hz
	Max	110	97	60
	Typical	68	59	36
	Energy Saving (Min/Med/Max)	50.6 / 35.1 / 18.0	44.8 / 32.1 / 17.9	28 / 20.8 / 12.9
	Stand-by	0.5W↓	0.5W↓	0.5W↓
EAN		8806098263264	8806098263257	8806098263219

Conessioni


49LU341H / 43LU341H / 32LU341H




49"

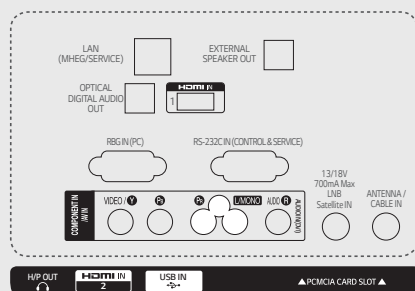



43"

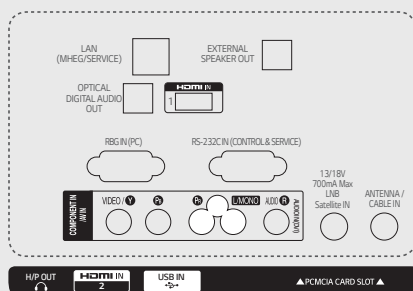



32"

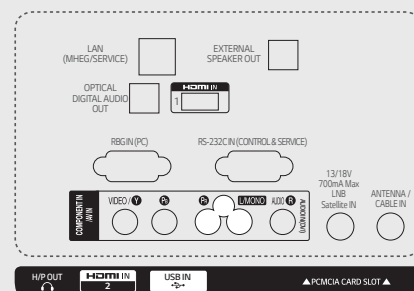

49"

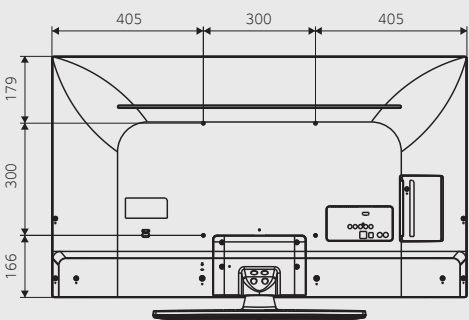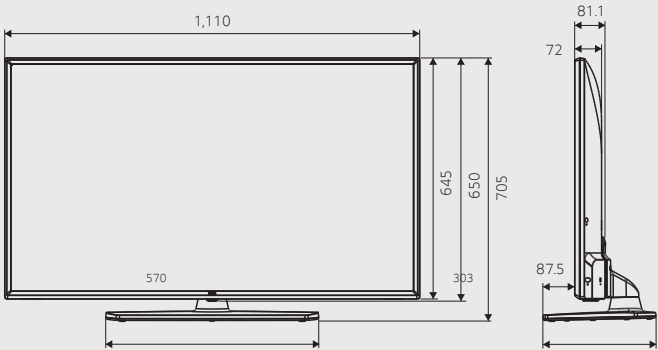

43"

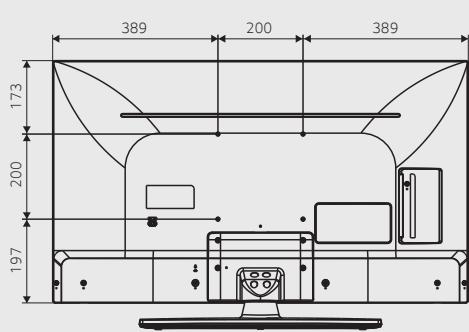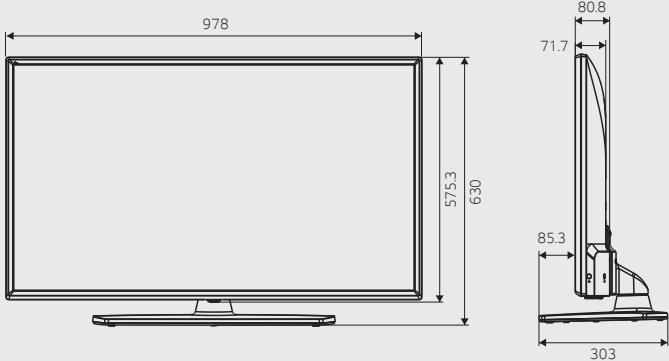

32"

