


		32	43	49	55
DISPLAY	Type	Direct LED			Edge LED
	Resolution	1,920 x 1,080 (FHD)			
	Brightness	240cd/m ²	400cd/m ²		
	Viewing Angle Degree	178° / 178°			
	Response Time	9			
BROADCASTING SYSTEM	Analog	PAL / SECAM			
	Digital	DVB-T2/C/S2			
VIDEO	Picture Engine	XD Engine			
	Real Cinema 24p (3:3 Pull down)	•			
	Aspect Ratio	• 6 modes (16:9, Original, Full wide, 4:3, Vertical Zoom, All-Direction Zoom)			
AUDIO	Audio Output / Speaker System	5W + 5W / 2.0ch	10W + 10W / 2.0 ch		
	Sound Mode	• 6 modes (Standard, Cinema, Clear Voice III, Sports, Music, Game)			
	Clear Voice	• (Clear Voice III)			
SOLUTION	Type	Pro:Centric® Smart, V, Direct, Quick Menu (TV Embedded Home UI)			
	Data Streaming (IP & RF)	•			
	RF	• (1 Tuner)			
	HCAP (SDK)	GEM / Flash /HTML5			
	Pro:Centric Application	PCA 3.7			
	Digital Right Management	ProIdiom			
SMART FEATURES	Smart UX	webOS 3.5, Commercial Smart Home, Web Browser, Pre-loaded Apps, SDP(Service Delivery Platform) compatibility, Magic Remote Ready			
	Connectivity	SoftAP, WiFi (ac), ScreenShare (Miracast), SmartShare, DIAL, Bluetooth Sound Sync, LG Sound Sync			
HOSPITALITY FEATURES		Hotel Mode, Lock Mode, Welcome Screen, Insert Image, External Speaker Out, Instant ON, One Channel Map, External Clock Ready (Except 24"/28"), External Power, RJP Compatibility, RTC (Real Time Clock), webRTC Ready			
GENERAL FEATURES	Installation	EzManager, USB Cloning			
	Management	Wake on RF, WOL, Remote Diagnostics, TVLink Interactive, IR Out, Multi IR Code, HTNG/HDMI-CEC			
	Setting Option	Auto Off/Sleep Timer, Smart Energy Saving, Motion Eye care			
	Anti-theft System	Kensington Lock, Credenza/Security Screw Hole, Lock Down Plate			
INTERFACE	Side	HDMI IN, USB(2), CI Slot			
	Rear	RF In (2), AV In, Video Component In (RCAS), Digital Audio Out (Optical), HDMI Input, RS-232C, Headphone Out, Clock Interface, RJ45 (2), External Speaker Out (2)			
DIMENSION (Unit :mm)	Vesa	200 x 200		300 x 300	
	W x H x D / weight (with stand)	739 x 495 x 241 / 6.1kg	974 x 625 x 303 / 12.5kg	1,107 x 702 x 303 / 14.6kg	1,241 x 770 x 303 / 19.7kg
	W x H x D / weight (packing)	905 x 530 x 162 / 7.4kg	1,147 x 660 x 175 / 14.6kg	1,296 x 770 x 171 / 17.8kg	1,360 x 860 x 190 / 24.4kg
POWER (Unit : Watts)	Voltage, Hz	100~240V, 50 / 60 Hz			
	Max	60.5	96.7	106.0	126.0
	Typical	48.0	73.8	83.0	105.0
	Energy saving (Min)	44.0	66.3	72.0	90.0
	Energy saving (Med)	31.4	45.0	49.0	60.0
	Energy saving (Max)	20.4	28.0	31.0	40.0
	Stand-by	0.3			
ECO	ErP Class	A	A	A	A+
	On Power Consumption (W)	40	66	77	86
	Luminance Ratio (%)	65			
	Mercury Content (mg)	0			
	Presence of Lead	Yes			
	Average Annual Consumption (kWh)	58	96	112	126
STANDARD APPROVAL	Safety	CB, CU TR			
	Environment	CE			
	Etc.	RoHS, ErP			
EAN		8806084570390	8806084673046	8806084675125	8806084659187

Connessioni

55LV761H
49LV761H
43LV761H
32LV761H

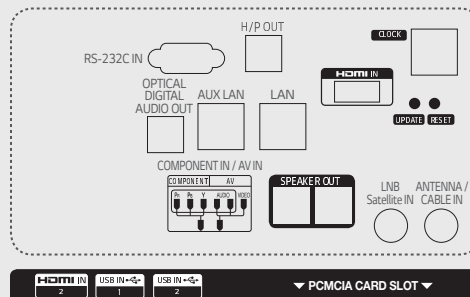


32"

739 x 495 x 241 /

6.1

*Swivel

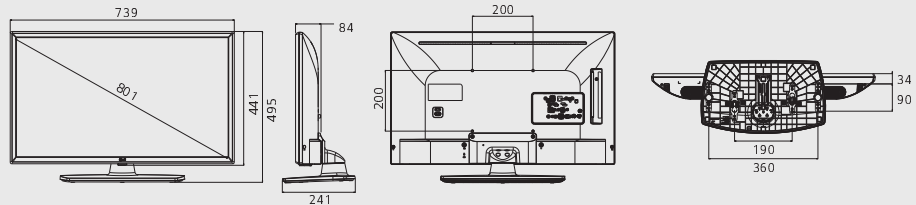


43"

974 x 625 x 303 /

12.5

*Swivel

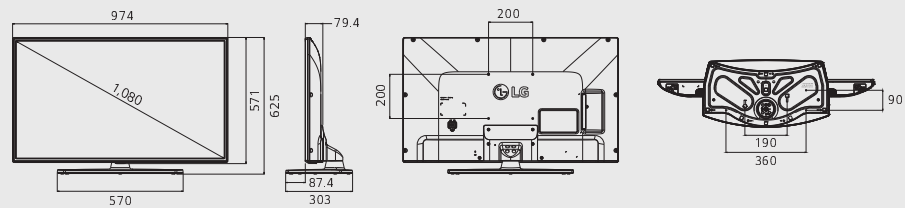


49"

1,107 x 702 x 303 /

14.6

*Swivel

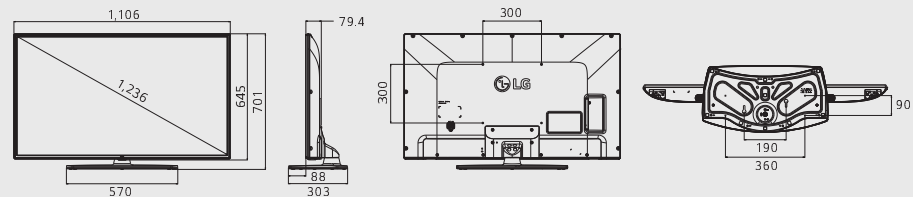

55"

1,241 x 770 x 303 /

19.5

*Swivel

