


		55VL5F	49VL5F
PANEL	Screen Size	55"	49"
	Panel Technology	IPS	IPS
	Aspect Ratio	16 : 9	16 : 9
	Native Resolution	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)
	Brightness (Typ.)	500 cd/m ²	450 cd/m ²
	Contrast Ratio	1,200:1	1,300:1
	Dynamic CR	500,000 : 1	500,000:1
	Viewing Angle (H x V)	178 x 178	178 x 178
	Response Time	8 ms (G to G)	8 ms (G to G)
	Surface Treatment	3%	3%
	Life Time (Typ.)	50,000 Hrs	50,000 Hrs
	Operation Hours	24 Hrs	24 Hrs
	Orientation	Landscape & Portrait	Landscape & Portrait
CONNECTIVITY	Input	HDMI(2), DP, DVI-D, Audio, USB	HDMI, DP, DVI-D, RGB, Audio, USB
	Output	DP, Audio	DP, Audio
	External Control	RS232C In/out, RJ45(LAN) In, IR In	RS232C In/out, RJ45 (LAN) In, IR In
MECHANICAL SPECIFICATION	Bezel Color	Black	Black
	Bezel Width	2.25 mm (T/L) / 1.25 mm(B/R)	2.3 mm (T/L), 1.2 mm (B/R)
	Monitor Dimension (W x H x D)	1,213.4 x 684.2 x 93.1 mm	1,077.6 x 607.8 x 89.7 mm
	Weight (Head)	23.2kg	17.8 kg
	Carton Dimensions (W x H x D)	1,337 x 828 x 239 mm	1,214 x 778 x 263 mm
	Packed Weight	30.5kg	22.8 kg
	Handle	Yes	Yes
	VESA™ Standard Mount Interface	600 x 400 mm	600 x 400 mm
KEY FEATURE		Temperature Sensor, Tile Mode (Up to 15x15), Natural Mode @Tile Mode, ISM Method, DPM Wake Up, Smart Energy Saving, File Play with USB, USB Cloning, Contents Scheduling (USB), Calibration Mode, PM Mode, Firmware Update (LAN), HDMI-CEC ¹⁾ , No Signal Image (Up to 5MB), Wake on LAN, Failover, OPS Power Control, Scan Inversion (with Pivot Mode)	
ENVIRONMENT CONDITIONS	Operation Temperature	0°C to 40°C	0°C to 40°C
	Operation Humidity	10% to 80%	10% to 80%
POWER	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type	Built-In Power	Built-In Power
	Power Consumption	Typ./Max.	130 W / 150 W
	Smart Energy Saving	62 W	55 W
CERTIFICATION	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC
	ErP / Energy Star	NA / Yes (Energy Star 7.0)	N/A / Yes (Energy Star 7.0)
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	No	No
	External Media Player Attachable	Yes (MP500/MP700)	Yes (MP500/MP700)
SOFTWARE COMPATIBILITY	Content Management Software	SuperSign CMS	SuperSign CMS
	Control and Monitoring Software	SuperSign Control/Control+	SuperSign Control/Control+
ACCESSORIES	Basic	Remote Controller, Power Cord, RS232C Cable, DP Cable, IR Receiver, Guide Bracket, Screws, Manual	
	Optional	Wall Mount (Landscape: WM-L640V, Portrait: WM-P640V)	

Connessioni


55VL5F / 49VL5F

- ① HDMI IN 1
- ② HDMI IN 2
- ③ DVI-D IN
- ④ DP IN
- ⑤ DP OUT
- ⑥ USB 2.0 IN
- ⑦ AUDIO IN
- ⑧ AUDIO OUT
- ⑨ LAN IN
- ⑩ IR IN
- ⑪ RS232C IN
- ⑫ RS232C OUT
- ⑬ RGB IN


HDMI™

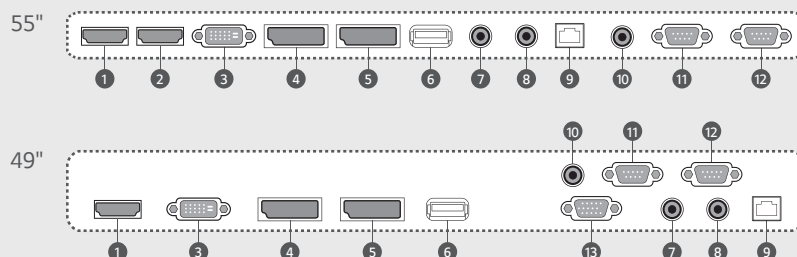


55"

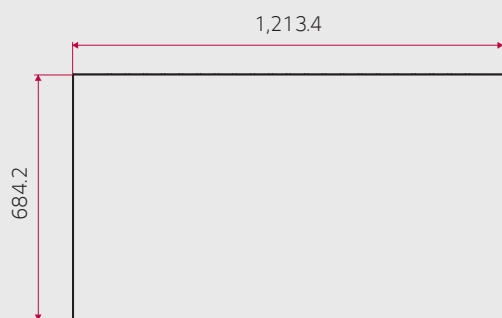

93.1

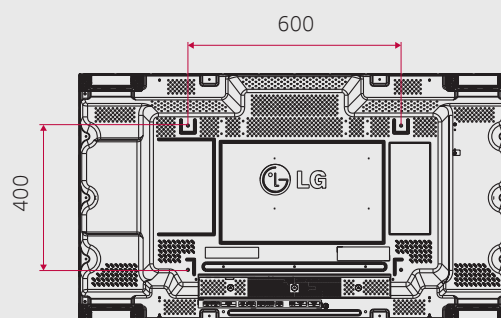

49"

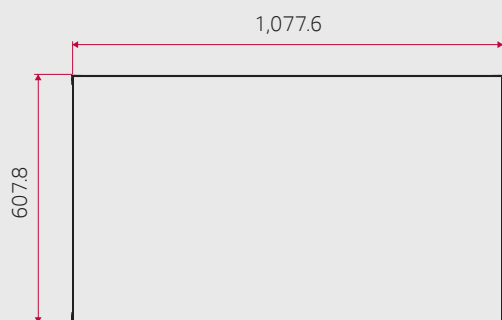

89.7

