


		49VL5D
PANEL	Screen Size	49"
	Panel Technology	IPS
	Aspect Ratio	16:9
	Native Resolution	1,920 x 1,080 (FHD)
	Brightness	450 cd/m²
	Contrast Ratio	1,300:1
	Viewing Angle (H x V)	178 x 178
	Response Time	8 ms (G to G)
	Surface Treatment	Hard Coating(3H), Anti-Glare Treatment of the Front Polarizer (Haze 10%)
	Operation Hours	24 Hrs
	Orientation	Landscape & Portrait
CONNECTIVITY	Input	HDMI, DP, DVI-D, RGB, Audio, USB 3.0
	Output	DP, Audio
	External Control	RS232C In/out, IR Receiver In
PHYSICAL SPECIFICATION	Bezel Color	Black
	Bezel Width	2.3 mm (L/T) / 1.2 mm (R/B)
	Monitor Dimension (W x H x D)	1,077.6 x 607.8 x 89.7 mm
	Weight(Head)	17.8 kg
	Carton Dimensions (W x H x D)	1,214 x 778 x 263 mm
	Packed Weight	22.8 kg
	Handle	Yes
	VESA™ Standard Mount Interface	600 x 400 mm
SPECIAL FEATURES		webOS 3.0+, Temperature Sensor, Tile Mode (up to 15x15), Natural Mode @Tile Mode, ISM Method, DPM Select, DPM Wake Up, Energy Saving, File Play with USB, Internal Memory 8GB (System 4GB + Available 4GB), USB Cloning, Contents Scheduling, Calibration Mode, Sync Mode, PM Mode, Wake on LAN, Pivot Mode, Fail Over, Media Share
ENVIRONMENT CONDITIONS	Operation Temperature Range	0°C to 40°C
	Operation Humidity Range	10% to 80%
POWER	Power Supply	100-240V~, 50/60Hz
	Power Type	Built-in Power
	Power Consumption	Typ. 93 W
		Max 110 W
		Smart Energy Saving 50 W
STANDARD (CERTIFICATION)	Safety	UL / cUL / CB / TUV / KC
	EMC	FCC Class "A" / CE / KCC
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	-
	External Media Player Attachable	Yes (MP500/MP700)
SOFTWARE COMPATIBILITY	Content Management Software	SuperSign Premium
	Control and Monitoring Software	SuperSign Link
ACCESSORIES	Basic	Remote Controller, Power Cable, DP Cable, Manual, IR Receiver, RS232C Cable, LAN Cable, Guide Bracket, Screws
	Optional	Wall Mount (Landscape: WM-L640V/ Portrait: WM-P640V)
EAN		TBD

Connessioni

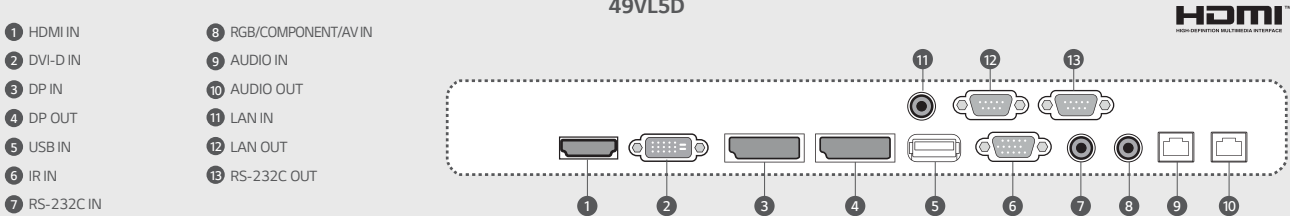

49"

1077,6 x 607,8 x 89,7 / 17,8 Kg

