


		49VL5E
PANEL	Screen Size	49"
	Panel Technology	IPS
	Aspect Ratio	16 : 9
	Native Resolution	1,920 x 1,080 (FHD)
	Brightness (Typ.)	450 cd/m ²
	Contrast Ratio	1,300:1
	Dynamic CR	500,000:1
	Viewing Angle (H x V)	178 x 178
	Color Depth	1.07 Billion
	Response Time	8 ms (G to G)
	Surface Treatment	Haze 3%
	Life Time (Typ.)	50,000 Hrs
	Operation Hours	24 Hrs
	Orientation	Landscape & Portrait
CONNECTIVITY	Input	HDMI, DP, DVI-D, RGB, Audio, USB 2.0
	Output	DP, Audio
	External Control	RS232C In/out, RJ45 (LAN) In, IR In
MECHANICAL SPECIFICATION	Bezel Color	Black
	Bezel Width	2.3 mm (T/L), 1.2 mm (B/R)
	Monitor Dimension (W x H x D)	1,077.6 x 607.8 x 89.7 mm
	Weight (Head)	17.8 kg
	Carton Dimensions (W x H x D)	1,214 x 778 x 263 mm
	Packed Weight	22.8 kg
	Handle	Yes
KEY FEATURE	VESA™ Standard Mount Interface	600 x 400 mm
	Temperature Sensor, Tile Mode (Up to 15x15), Natural Mode@Tile Mode, ISM Method, DPM Select, Smart Energy Saving, USB Cloning, Easy Brightness Control, Contents Scheduling (USB), Calibration Mode, Sync Mode, PM Mode, HDMI-CEC ¹⁾ , Wake on LAN, OSD Portrait Mode, Fail Over, No Signal Image, OPS Power Control, Scan Inversion (with Pivot Mode)	
ENVIRONMENT CONDITIONS	Operation Temperature	0°C to 40°C
	Operation Humidity	10% to 80%
POWER	Power Supply	100-240V~, 50/60Hz
	Power Type	Built-In Power
	Typ.	90 W
	Power Consumption Max.	110 W
	Smart Energy Saving	55 W
CERTIFICATION	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KC
	ErP / Energy Star	N/A / Yes (Energy Star 7.0)
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	No
	External Media Player Attachable	Yes (MP500/MP700)
SOFTWARE COMPATIBILITY	Content Management Software	SuperSign CMS
	Control and Monitoring Software	SuperSign Control/Control+
ACCESSORIES	Basic	Remote Controller, Power Cord, RS232C Cable, LAN Cable, DP Cable, IR Receiver, Guide Bracket, Screws, Manual
	Optional	Wall Mount (Landscape: WM-L640V, Portrait: WM-P640V)

1) Compatibility may differ by equipment.

Connessioni

- ① HDMI IN 1
- ② DVI-D IN
- ③ DP IN
- ④ DP OUT
- ⑤ USB 2.0 IN
- ⑥ RGB IN
- ⑦ AUDIO IN
- ⑧ AUDIO OUT
- ⑨ LAN IN
- ⑩ IR IN
- ⑪ RS232C IN
- ⑫ RS232C OUT

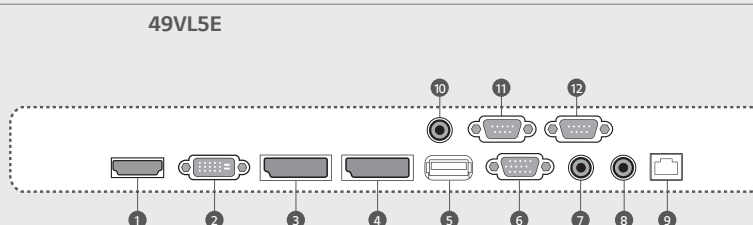

HDMI™

HIGH-DEFINITION MULTIMEDIA INTERFACE

