


		55VM5B
PANEL	Screen Size	55"
	Panel Technology	IPS
	Aspect Ratio	16 : 9
	Native Resolution	1,920 x 1,080 (FHD)
	Brightness	500 cd/m ²
	Contrast Ratio	1,400:1
	Dynamic CR	500,000:1
	Viewing Angle (H x V)	178 x 178
	Response Time	8ms (G to G)
	Surface Treatment	Hard coating (2 H), Anti-glare treatment of the front polarizer (Haze 10 %)
	Guaranteed Operating Hour	24 Hours
CONNECTIVITY	Orientation	Portrait & Landscape
	Input	HDMI, DP, DVI-D, OPS, Audio, USB 2.0, USB 3.0, RGB
	Output	DP, Audio
PHYSICAL SPECIFICATION	External Control	RS232C, RJ45, IR Receiver
	Bezel Color	-
	Bezel Width	0.9 mm (Top/Bottom/Left/Right even bezel) 1.8 mm *B to B : Panel Bezel + Panel Bezel
	Monitor Dimension (W x H x D)	1,211.4 x 682.2 x 86.5 mm
	Weight (Head)	18.6 kg
	Carton Dimensions (W x H x D)	1,353 x 855 x 263 mm
	Packed Weight	25.3 kg
	VESA™ Standard Mount Interface	600 x 400 mm
SPECIAL FEATURES		Temperature Sensor, Tile Mode (up to 15 x 15), Natural Mode@Tile Mode, Energy Saving, Smart Energy Saving, File Play with USB, Internal Memory (8 GB, System 4 GB + Available 4 GB), Wi-Fi Dongle Ready, USB Cloning, Content Scheduling, Fail over (USB, RGB, DVI, HDMI, Internal Memory)
ENVIRONMENTAL CONDITIONS	Operating Temperature Range	0 °C to 40 °C
	Operating Humidity Range	10 % to 80 %
POWER	Power Supply	100-240V~, 50/60Hz
	Power Type	Built-In Power
POWER CONSUMPTION	Typ.	150 W
	Smart Energy Saving	80 W
STANDARD (CERTIFICATION)	Safety	UL / cUL / CB / TUV / KC
	EMC	FCC Class "A" / CE / KCC
	ErP / Energy Star	NA / Yes (Energy Star 7.0)
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	Yes
	External Media Player Attachable	Yes (MP500/MP700)
SOFTWARE COMPATIBILITY	SuperSign W/Lite	Yes
	SuperSign C	Yes
ACCESSORIES	Basic	Remote controller, Power cable, DP cable, Manual, IR receiver, RS-232C cable, LAN cable, Guide bracket, Screws
	Optional	Wall mount (Landscape: WM-L640V, Portrait: WM-P640V), OPS kit (KT-OPSA), HDBaseT (EB-B100)
EAN		TBD

Conessioni

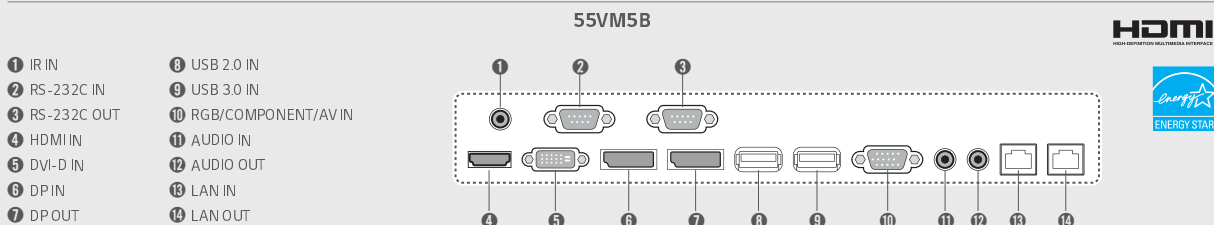

55"

1,211.4 x 682.2 x 86.5 mm

18.6 kg

