


		55VM5E	49VM5E
PANEL	Screen Size	55"	49"
	Panel Technology	IPS	IPS
	Aspect Ratio	16:9	16:9
	Native Resolution	1,920 X 1,080 (FHD)	1,920 X 1,080 (FHD)
	Brightness (Typ.)	500 cd/m ²	500 cd/m ²
	Contrast Ratio	1,200:1	1,200:1
	Dynamic CR	30,000:1	30,000:1
	Viewing Angle (H x V)	178 x 178	178 x 178
	Color Depth	1.07 Billion	1.07 Billion
	Response Time	8 ms (G to G)	8 ms (G to G)
	Surface Treatment	Haze 3%	Haze 3%
	Life Time (Typ.)	60,000 Hrs	60,000 Hrs
	Operation Hours	24 Hrs	24 Hrs
	Orientation	Landscape & Portrait	Landscape & Portrait
CONNECTIVITY	Input	HDMI (2), DP, DVI-D, Audio, USB 2.0	HDMI (2), DP, DVI-D, Audio, USB 2.0
	Output	DP, Audio	DP, Audio
	External Control	RS232C In/out, RJ45 (LAN) In/out, IR In	RS232C In/out, RJ45 (LAN) In/out, IR In
MECHANICAL SPECIFICATION	Bezel Color	Black	Black
	Bezel Width	0.9 mm (Even), B to B ¹⁾ 1.8 mm	0.9 mm (Even), B to B ¹⁾ 1.8 mm
	Monitor Dimension (W x H x D)	1,211.4 x 682.2 x 86.5 mm	1,075.7 x 605.8 x 86.2 mm
	Weight (Head)	18.6 kg	17.5 kg
	Carton Dimensions (W x H x D)	1,353 x 855 x 263 mm	1,214 x 775 x 263 mm
	Packed Weight	25.3 kg	23.2 kg
	Handle	Yes	Yes
	VESA™ Standard Mount Interface	600 x 400 mm	600 x 400 mm
KEY FEATURE		Internal Memory 8GB (System 4GB + Available 4GB), Temperature Sensor, Tile Mode (Up to 15x15), Natural Mode @Tile Mode, ISM Method, DPM Select, Smart Energy Saving, Contents Scheduling (USB, Internal Memory), USB Cloning, Calibration Mode, Sync Mode, PM Mode, Firmware Update (LAN), HDMI-CEC ²⁾ , Wake on LAN, Fail Over, No Signal Image, Embedded Template, OPS Power Control, Scan Inversion (with Pivot Mode)	
ENVIRONMENT CONDITIONS	Operation Temperature	0°C to 40°C	0°C to 40°C
	Operation Humidity	10% to 80%	10% to 80%
POWER	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type	Built-In Power	Built-In Power
	Typ.	150 W	120 W
	Power Consumption	180 W	140 W
	Smart Energy Saving	80 W	70 W
CERTIFICATION	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	
	EMC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC
	ErP / Energy Star	NA / Yes (Energy Star 7.0)	NA / Yes (Energy Star 7.0)
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	Yes (Piggyback)	Yes (Piggyback)
	External Media Player Attachable	Yes (MP500/MP700)	Yes (MP500/MP700)
SOFTWARE COMPATIBILITY	Content Management Software	SuperSign CMS	SuperSign CMS
	Control and Monitoring Software	SuperSign Control/Control+	SuperSign Control/Control+
ACCESSORIES	Basic	Remote Controller, Power Cord, RS232C Cable, LAN Cable, DP Cable, IR Receiver, Guide Bracket, Screws, Manual	
	Optional	Wall Mount (Landscape : WM-L640V, Portrait : WM-P640V)	

1) B to B: Panel bezel to panel bezel
2) Compatibility may differ by equipment.

Connessioni

- ① HDMI IN 1
- ② HDMI IN 2
- ③ DVI-D IN
- ④ DP IN
- ⑤ DP OUT
- ⑥ USB 2.0 IN
- ⑦ AUDIO IN
- ⑧ AUDIO OUT
- ⑨ LAN IN
- ⑩ LAN OUT
- ⑪ IR IN
- ⑫ RS232C IN
- ⑬ RS232C OUT

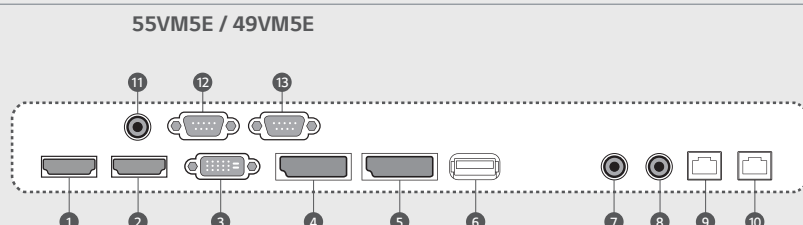

HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE

