

55SVH7PF		
PANEL	Screen Size	55"
	Panel Technology	IPS RGB
	Aspect Ratio	16:9
	Native Resolution	1,920 x 1,080 (FHD)
	Brightness (Typ.)	700 cd/m <sup>2</sup>
	Contrast Ratio	1,100:1
	Dynamic CR <sup>1)</sup>	500,000:1
	Viewing Angle (H x V)	178 X 178
	Response Time	8 ms (G to G)
	Surface Treatment	Haze 28%
	Life Time (Typ.)	60,000 Hrs
	Operation Hours	24 Hrs
CONNECTIVITY	Orientation	Landscape & Portrait
	Input	HDMI (2), DP, DVI-D, Audio, USB, Power In, Power Loop In
	Output	DP, Audio, Power Loop Out
MECHANICAL SPECIFICATION	External Control	RS232C In/out, RJ45 (LAN) In/out, IR In
	Bezel Color	Black
	Bezel Width	0.44 mm (Even)
	Monitor Dimension (W x H x D)	1,210.5 x 681.2 x 86.5 mm
	Weight (Head)	16.2 kg
	Carton Dimensions (W x H x D)	1,353 x 855 x 263 mm
	Packed Weight	23.2 kg
	Handle	Yes
	VESA™ Standard Mount Interface	600 x 400 mm
	KEY FEATURE	Internal Memory 8GB (System 4GB, Available 4GB), Temperature Sensor, Tile Mode (Up to 15x15), UHD Daisy Chain (Up to 10x10), ISM Method, DPM Select, DPM Wake Up, Smart Energy Saving, File Play with USB, USB Cloning, Contents Scheduling, Calibration Mode, PM Mode, HDMI-CEC <sup>2)</sup> , Wake on LAN, Content Rotation, No Signal Image (Up to 5MB), OPS Power Control, Scan Inversion (with Pivot Mode)
ENVIRONMENTAL CONDITIONS	Operation Temperature	0°C to 40°C
	Operation Humidity	10% to 80%
POWER	Power Supply	-
	Power Type	External Power Box <sup>3)</sup>
	Power Consumption	Typ. 188W
		Max. 240W
CERTIFICATION	Safety	IEC 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KC
	ErP / Energy Star	-
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	Yes (Piggyback)
	External Media Player Attachable	Yes (MP500 / MP700)
SOFTWARE COMPATIBILITY	Content Management Software	SuperSign CMS
	Control and Monitoring Software	SuperSign Control / Control+
ACCESSORIES	Basic	Remote Controller, RS232C Cable, Lan Cable, DP Cable, IR Receiver, Guide Bracket, Screws, Manual, Power loop cable
	Optional	Wall Mount (Landscape : WM-L640V, Portrait : WM-P640V), External Power Box (LPLG001-FV <sup>4)</sup> ), Power cable (6m, ACC-LAPPC06), Power cable (60m, ACC-LAPPC60), OPS Kit (KT-OPSF)

1) The luminosity ratio of Full Black/Full White color on video input condition. 2) Availability may differ by equipment. 3) An external power box (LPLG001-FV) needs to be purchased separately. 4) An external power box includes two 6m power cables, and you can purchase 60m power cables. \* Specifications are subject to change without notice, so please contact LG sales team to verify before ordering.


## Conessioni

### 55SVH7PF



- |             |              |             |              |                  |                   |                                |
|-------------|--------------|-------------|--------------|------------------|-------------------|--------------------------------|
| 1 HDMI IN 1 | 4 DP IN      | 7 AUDIO IN  | 10 LAN OUT   | 13 RS232C OUT    | 16 POWER-LOOP OUT | 19 LAN IN                      |
| 2 HDMI IN 2 | 5 DP OUT     | 8 AUDIO OUT | 11 IR IN     | 14 POWER IN      | 17 AC-IN          | 20 RS232C IN (Phone jack type) |
| 3 DVI-D IN  | 6 USB 2.0 IN | 9 LAN IN    | 12 RS232C IN | 15 POWER-LOOP IN | 18 USB 2.0 IN     | 21 POWER OUT                   |

55"

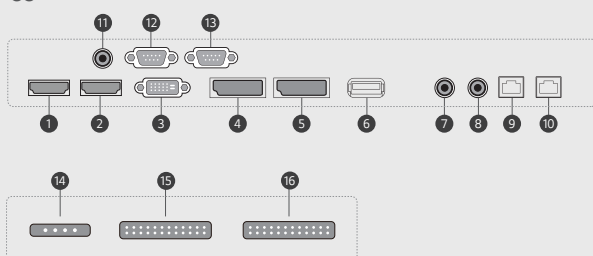

### External Power Box (LPLG001-FV)

