


		49VL7D
PANEL	Screen Size	49"
	Aspect Ratio	16 : 9
	Native Resolution	1,920 x 1,080 (FHD)
	Brightness	700 cd/m²
	Viewing Angle (H x V)	178 x 178
	Surface Treatment	Hard Coating (3H), Anti-glare Treatment of the Front Polarizer (Haze 3%)
	Life time	50,000 Hrs
	Operation Hours	24 Hrs
	Orientation	Landscape & Portrait
CONNECTIVITY	Input	HDMI, DVI-D, RGB, USB
	Output	DVI-D
	External Control	RS232C In/out, RJ45 In, IR Receiver In
PHYSICAL SPECIFICATION	Bezel Color	Black
	Bezel Width	2.3 mm (L/T) / 1.2 mm (R/B)
	Monitor Dimension (W x H x D)	1,077.6 x 607.8 x 89.7 mm
	Weight (Head)	17.8 kg
	Carton Dimensions (W x H x D)	1,214 x 778 x 263 mm
	Packed Weight	22.8 kg
	Handle	Yes
VESA™ Standard Mount Interface		600 x 400 mm
SPECIAL FEATURES		Temperature Sensor, Tile Mode (Up to 15x15), Natural Mode @Tile Mode, ISM Method, DPM Select, Energy Saving, Smart Energy Saving, File Play with USB
ENVIRONMENT CONDITIONS	Operation Temperature Range	0°C to 40°C
	Operation Humidity Range	10% to 80%
POWER	Power Supply	100-240V~, 50/60Hz
	Power Type	Built-in Power
	Power Consumption Typ.	130 W
	Smart Energy Saving	50 W
STANDARD (CERTIFICATION)	Safety	UL / cUL / CB / TUV / KC
	EMC	FCC Class "A" / CE / KCC
	ErP / Energy Star	NA / Energy Star 7.0 (US Only)
MEDIA PLAYER COMPATIBILITY	Slot PC Compatible (Optional)	No
	External Media Player Attachable	Yes
SOFTWARE COMPATIBILITY	Content Management Software	SuperSign CMS
	Control and Monitoring Software	SuperSign C
ACCESSORIES	Basic	Remote Controller, Power Cable, DVI Cable, Manual, IR Receiver, RS232C Cable, Guide Bracket, Screw
	Optional	Wall Mount (Landscape: WM-L640V, Portrait: WM-P640V)
EAN		TBD

Conessioni

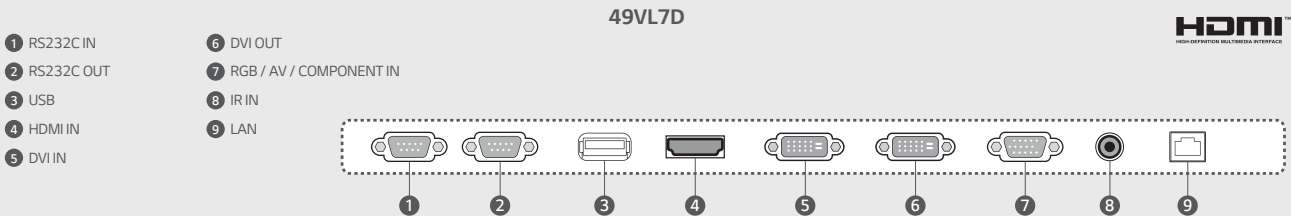

49"

1077,6 x 607,8 x 89,7 / 17,8 Kg

