


		65SM5KD	55SM5KD	49SM5KD	43SM5KD	32SM5KD
PANEL	Screen Size	65"	55"	49"	43"	32"
	Panel Technology	IPS				
	Aspect Ratio	16 : 9				
	Native Resolution	1,920 x 1,080 (FHD)				
	Brightness	450 cd/m ²				400 cd/m ²
	Viewing Angle (H x V)	178 x 178				
	Response Time	10 ms (G to G BW), 7.6 ms (WOT)	12 ms (G to G BW), 9.0 ms (WOT)	12 ms (G to G BW), 10.1 ms (WOT)	12 ms (G to G BW), 9.4 ms (WOT)	10 ms (G to G BW), 7.1 ms (WOT)
	Surface Treatment	Hard coating (3H), Anti-glare treatment of the front polarizer (Haze 1 % (Typ.))				
	Guaranteed Operating Hour	24 hrs				
CONNECTIVITY	Orientation	Portrait & Landscape				
	Input	HDMI (2), DP, DVI-D, RGB, Audio, USB 3.0				
	Output	DP, Audio				
PHYSICAL SPECIFICATION	External Control	RS232C in/out, RJ in, IR Receiver, Pixel Sensor				
	Bezel Color	Black				
	Bezel Width	11.9 mm (T/R/L), 18 mm (B)	11.9 mm (T/R/L), 18 mm (B)	11.9 mm (T/R/L), 18 mm (B)	11.9 mm (T/R/L), 18 mm (B)	13 mm (T/R/L), 18 mm (B)
	Monitor Dimension (W x H x D)	1,456.9 x 838 x 56.5 mm	1,238 x 714.9 x 54 mm	1,102.2 x 638.5 x 54 mm	969.6 x 563.9 x 54 mm	729.4 x 428.9 x 55.5 mm
	Weight (Head)	27.9 kg	17.5 kg	14.3 kg	10.0 kg	5.4 kg
	Monitor with Optional Stand Dimensions (W x H x D)	1,456.9 x 898.1 x 293.7 mm	1,238 x 773.4 x 219.6 mm	1,102.2 x 696.8 x 219.6 mm	969.6 x 622.2 x 193 mm	729.4 x 481 x 154.2 mm
	Weight (Head + Stand)	33.1 kg	20.8 kg	17.6 kg	12.5 kg	6.2 kg
	Carton Dimensions (W x H x D)	1,561 x 977 x 190 mm	1,330 x 807 x 170 mm	1,197 x 760 x 166 mm	1,052 x 650 x 123 mm	810 x 510 x 132 mm
	Packed Weight	33.8 kg	21.7 kg	17.4 kg	12.6 kg	6.7 kg
	VESA™ Standard Mount Interface	300 x 300 mm	300 x 300 mm	300 x 300 mm	200 x 200 mm	200 x 200 mm
SPECIAL FEATURES		Temperature Sensor, Auto Brightness Sensor, Tile Mode (Up to 15x15), DPM Select, DPM Wake Up, Energy Saving, Smart Energy Saving, File Play with USB, PIP/PBP (2), Internal Memory (8 GB), USB Cloning, Easy Brightness Control, Holiday Schedule, Limited Mode, Wake on LAN, Fail Over, Mirroring, SoftAP, BEACON, Embedded Template				
ENVIRONMENTAL CONDITIONS	Operating Temperature	0°C to 40°C	0°C to 40°C	0°C to 40°C	0°C to 40°C	0°C to 40°C
	Operating Humidity	10% to 80%	10% to 80%	10% to 80%	10% to 80%	10% to 80%
POWER	Power Supply	100-240 V~, 50/60 Hz				
	Power Type	Built-In Power				
	Power Switch	No				
POWER CONSUMPTION	Typ.	120 W	100 W	85 W	75 W	60 W
	Smart Energy Saving	85 W	70 W	60 W	55 W	45 W
STANDARD (CERTIFICATION)	Safety	UL / cUL / CB / TUV / KC				
	EMC	FCC Class "A" / CE / KCC				
	ErP / Energy Star	NA / Yes (Energy Star 7.0)				
	Audio Power	20 W (10 W x 2) for Internal Speaker (6 ohm)				
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	Yes				
	External Media Player Attachable	Yes (MP500/MP700)	Yes (MP500/MP700)	Yes (MP500/MP700)	Yes (MP500/MP700)	No
SOFTWARE COMPATIBILITY	SuperSign Premium	Yes				
	SuperSign Link	Yes				
ACCESSORIES	Basic	Remote Controller (included 2ea batteries), Power Cord, QSG, RGB Cable, Regulation Book, Phone to RS232C Gender Memory cover				
	Optional	Speaker (SP-5000), Stand (ST-652T), Pixel Sensor (KT-SP0), Media Player, Wall Bracket (LSW350B), VESA Adapter (AMB330S), OPS Kit (KT-OPSA), HDBaseT (EB-B100), Touch Overlay (KT-T651)	Speaker (SP-5000), Stand (ST-492T), Pixel Sensor (KT-SP0), Media Player, Wall Bracket (LSW350B), VESA Adapter (AM-B330S), OPS Kit (KT-OPSA), HDBaseT (EB-B100), Touch Overlay (KT-T550)	Speaker (SP-5000), Stand (ST-492T), Pixel Sensor (KT-SP0), Media Player, Wall Bracket (LSW350B), VESA Adapter (AM-B330S), OPS Kit (KT-OPSA), HDBaseT (EB-B100), Touch Overlay (KT-T490)	Speaker (SP-5000), Stand (ST-432T), Pixel Sensor (KT-SP0), Media Player, Wall Bracket (LSW230B), VESA Adapter (AM-B220S), OPS Kit (KT-OPSA), HDBaseT (EB-B100), Touch Overlay (KT-T430)	Speaker (SP-5000), Stand (ST-322T), Pixel Sensor (KT-SP0), Media Player, Wall Bracket (LSW230B), OPS Kit (KT-OPSA), HDBaseT (EB-B100), Touch Overlay (KT-T320)
EAN		8806087764307	8806087764130	8806087763751	8806087762884	8806087761641

Connessioni


- 1 SPEAKER OUT
- 2 AUDIO IN
- 3 AUDIO OUT
- 4 HDMI
- 5 RS-232C IN
- 6 RS-232C OUT
- 7 PIXEL SENSOR
- 8 IR & LIGHT SENSOR
- 9 DVI-D IN
- 10 DP IN
- 11 DP OUT
- 12 RGB IN
- 13 LAN
- 14 USB 3.0



65SM5KD

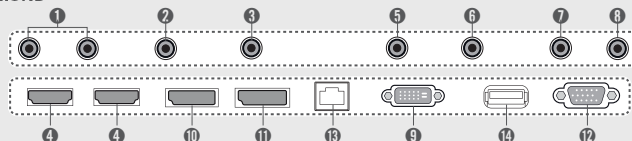


55SM5KD / 49SM5KD / 43SM5KD / 32SM5KD

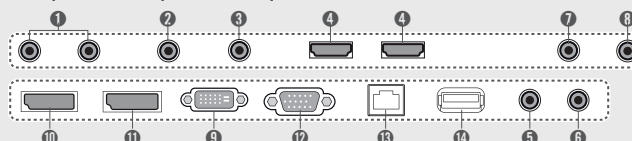


65"

1,456.9 x 838 x 56.5 /
27.9 kg

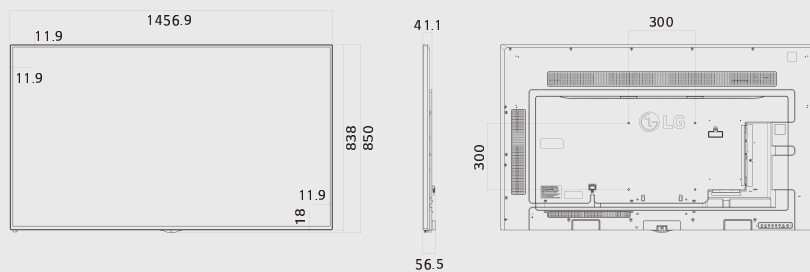


55"

1,238 x 714.9 x 54 /
17.5 kg

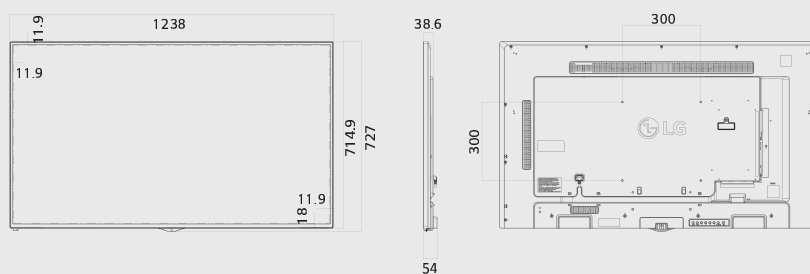


49"

1,102.2 x 638.5 x 54 /
14.3 kg

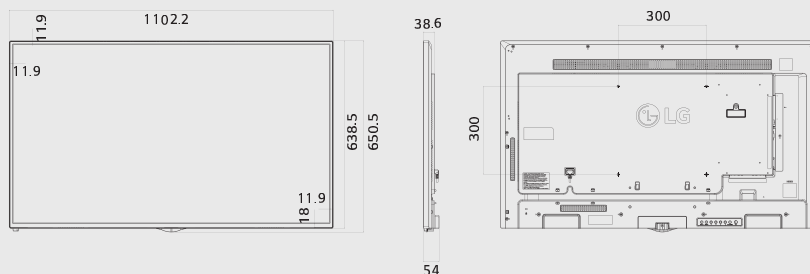

43"

969.6 x 563.9 x 54 /
10.0 kg

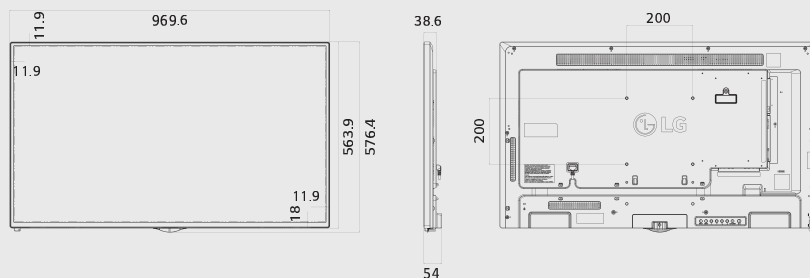

32"

729.4 x 428.9 x 55.5 /
5.4 kg

