

		65UH7F	55UH7F	49UH7F
PANEL	Screen Size	65"	55"	49"
	Panel Technology	IPS	IPS	IPS
	Aspect Ratio	16 : 9	16 : 9	16 : 9
	Native Resolution	3,840 x 2,160 (UHD, RGB)	3,840 x 2,160 (UHD, RGB)	3,840 x 2,160 (UHD, RGB)
	Brightness (Typ.)	700 cd/m ²	700 cd/m ²	700 cd/m ²
	Contrast Ratio	1,100:1	1,100:1	1,100:1
	Viewing Angle (H x V)	178 x 178	178 x 178	178 x 178
	Response Time	8ms (G to G)	8ms (G to G)	8ms (G to G)
	Surface Treatment (Haze)	Haze 3%	Haze 3%	Haze 3%
	Life Time (Typ.)	50,000 Hrs	50,000 Hrs	50,000 Hrs
	Operation Hours	24 Hrs	24 Hrs	24 Hrs
	Orientation	Portrait & Landscape	Portrait & Landscape	Portrait & Landscape
CONNECTIVITY	Input	HDMI (3), DP, DVI-D, Audio, USB 2.0		
	Output	DP, Audio (Off/Fixed/Variable),		
	External Control	RS232C In/Out, RJ45 (LAN) In, IR In		
MECHANICAL SPECIFICATION	Bezel Color	Black	Black	Black
	Bezel Width	9.9mm(T/R/L), 14.4mm(B)	9.9mm(T/R/L), 14.4mm(B)	9.9mm(T/R/L), 14.4mm(B)
	Monitor Dimension (W x H x D)	1,453.3mm x 844mm x 39.9mm	1,234.4mm x 720.9mm x 39.9mm	1,098.6mm x 644.5mm x 39.9mm
	Weight (Head)	28.2 kg	18.9 kg	15.4 kg
	Carton Dimensions (W x H x D)	1,600mm x 970mm x 175mm	1,360mm x 810mm x 175mm	1,197mm x 740mm x 162mm
	Packed Weight	32.5 kg	23.4 kg	18 kg
	Handle	No	No	No
	VESA™ Standard Mount Interface	300 x 300	300 x 300	300 x 300
KEY FEATURE		Internal Memory 8GB (System 4GB + Available 3.6GB), Built-in Wi-Fi, Built-in Speaker, Temperature Sensor, Auto Brightness Sensor, Acceleration Sensor, Local Key Operation, Embedded CMS (USB Auto Playback, Local Contents Scheduling, Group Manager), Fail over, Image Customization (Bootting Logo, No Signal), Content Sync (RS232C, Local Network), PIP/PBP(4), Screen Share, Video Tag(4), Play via URL, OSD Rotation, Tile Mode Setting (Max. 15 x 15), Setting Data Cloning, Firmware Update by Network, SNMP 2.0, ISM Mode, Crestron Connected® ¹⁾ , DPM, Smart Energy Saving, Wake on LAN, Beacon, HDMI-CEC ²⁾ , SI Server Setting		
SPECIAL FEATURE	Tilt (Max)	+30°	+30°	+30°
	IP Rating	IP5x	IP5x	IP5x
ENVIRONMENTAL CONDITIONS	Operation Temperature	0°C to 40°C	0°C to 40°C	0°C to 40°C
	Operation Humidity	10% to 80%	10% to 80%	10% to 80%
POWER	Power Supply		100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type		Built-In Power	Built-In Power
	Power Consumption	Typ. / Max.	130W / 180W	110W / 160W
		Smart Energy Saving	100W	85W
SOUND	Speaker		Built-in (10Wx2)	Built-in (10Wx2)
	Safety		IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1
CERTIFICATION	EMC		FCC Class "A" / CE / KC	FCC Class "A" / CE / KC
	ErP / Energy Star		Yes / Yes (Energy Star 7.0)	Yes / Yes (Energy Star 7.0)
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible		Yes	Yes
	External Media Player Attachable		Yes	Yes
SOFTWARE COMPATIBILITY	Content Management Software		SuperSign CMS	SuperSign CMS
	Control and Monitoring Software		SuperSign Control/Control+	SuperSign Control/Control+
	Signage365Care		Yes	Yes
ACCESSORIES	Basic		Remote Controller, Power Cord, QSG, HDMI Cable, Regulation Book, Phone to RS232C Gender	
	Optional		Stand (ST-653T), Media Player, Wall Bracket (LSW350B), VESA Adapter (AM-B330S), OPS Kit (KT-OPSH)	


1) Network based control 2) Compatibility may differ by equipment

Conessioni


65UH7F / 55UH7F / 49UH7F




- ① LAN
- ② HDMI IN1
- ③ HDMI IN2
- ④ DP IN
- ⑤ DP OUT
- ⑥ HDMI IN3
- ⑦ DVI-D IN
- ⑧ IR & LIGHT SENSOR
- ⑨ USB IN
- ⑩ AUDIO IN
- ⑪ AUDIO OUT
- ⑫ RS-232C IN
- ⑬ RS-232C OUT

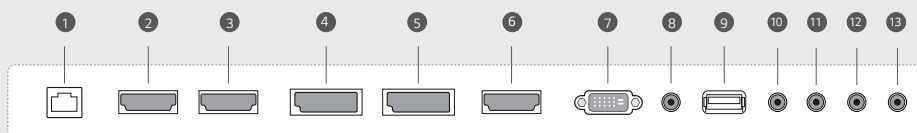

65"

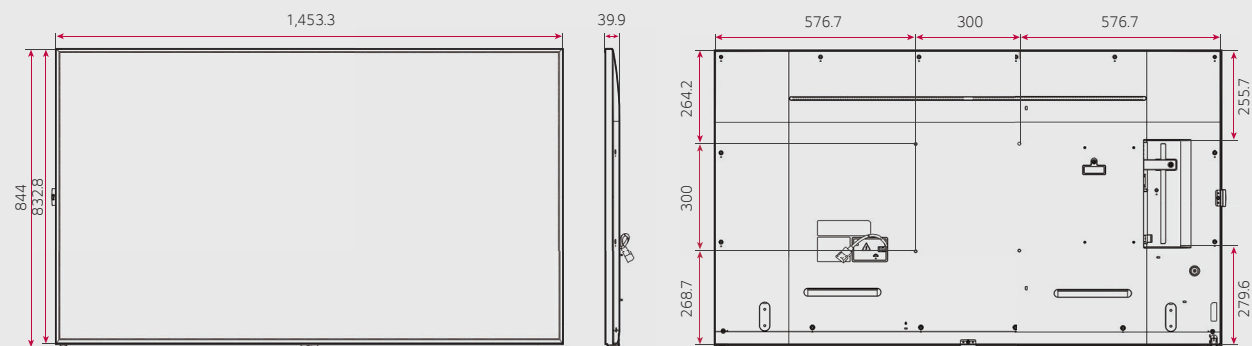

55"

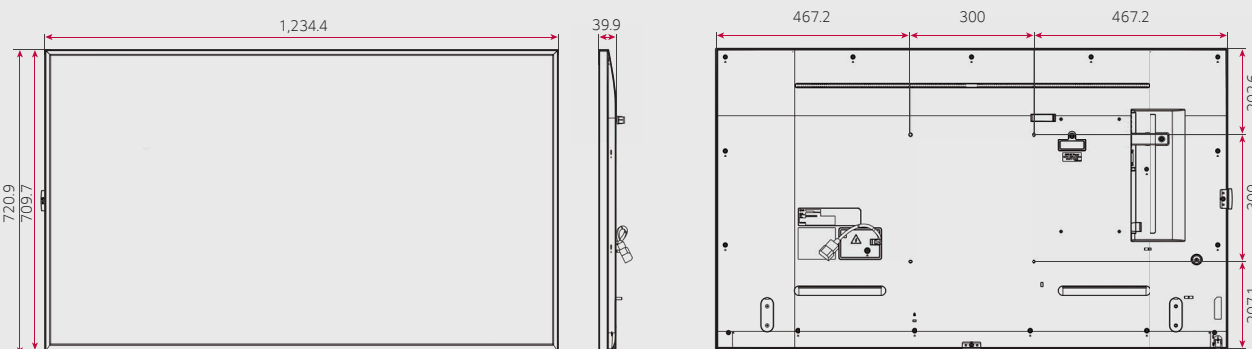

49"

