




		65UH5E	55UH5E	49UH5E
PANEL	Screen Size	65"	55"	49"
	Panel Technology	IPS	IPS	IPS
	Aspect Ratio	16 : 9	16 : 9	16 : 9
	Native Resolution	3,840 x 2,160 (UHD, RGB)	3,840 x 2,160 (UHD, RGB)	3,840 x 2,160 (UHD, RGB)
	Brightness (Typ.)	500 cd/m ²	500 cd/m ²	500 cd/m ²
	Contrast Ratio	1,100:1	1,100:1	1,100:1
	Viewing Angle (H x V)	178 x 178	178 x 178	178 x 178
	Response Time	8ms (G to G)	8ms (G to G)	8ms (G to G)
	Surface Treatment (Haze)	Haze 28%	Haze 28%	Haze 28%
	Life Time (Typ.)	50,000 Hrs	50,000 Hrs	50,000 Hrs
	Operation Hours	24 Hrs	24 Hrs	24 Hrs
	Orientation	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait
CONNECTIVITY	Input	HDMI (3), DP, DVI-D, Audio, USB 2.0 (2)		
	Output	DP, Audio (Off/Fixed/Variable), External Speaker		
	External Control	RS232C In/out, RJ45 (LAN) In, IR In		
MECHANICAL SPECIFICATION	Bezel Color	Black	Black	Black
	Bezel Width	12.1 mm (T), 12.6 mm (R/L), 15.7 mm (B)	12.1 mm (T), 12.6 mm (R/L), 15.7 mm (B)	11.9 mm (T), 12.4 mm (R/L), 15.5 mm (B)
	Monitor Dimension (W x H x D)	1,458.6 x 848.9 x 40.1 mm	1,239.8 x 725.2 x 38.6 mm	1,103.2 x 648 x 38.6 mm
	Weight (Head)	26 kg	16.6 kg	13.3 kg
	Carton Dimensions (W x H x D)	1,561 x 971 x 190 mm	1,330 x 807 x 170 mm	1,197 x 760 x 166 mm
	Packed Weight	32.5 kg	21.1 kg	17.7 kg
	Handle	No	No	No
	VESA™ Standard Mount Interface	300 x 300 mm	300 x 300 mm	300 x 300 mm
KEY FEATURE		Internal Memory 8GB (System 4GB + Available 3.6GB), Built-in Wi-Fi, Temperature Sensor, Auto Brightness Sensor, Current Sensor, Embedded CMS (USB Auto Playback, Local Contents Scheduling, Group Manager), Image Customization, Failover, Content Sync (RS232C, Local Network), Screen Share, Video Tag (2), Play via URL, OSD Rotation, Content Rotation, PIP/PBP (4), Tile Mode Setting (Max 15 x 15), Setting Data Cloning, Firmware Update by Network, SNMP 1.4, ISM Mode, Crestron Connected ^{*)} , Control Manager, DPM, Smart Energy Saving, Wake on LAN, Beacon, HDMI-CEC ²⁾ , SI Server Setting, Detachable Logo		
ENVIRONMENTAL CONDITIONS	Operation Temperature	0°C to 40°C	0°C to 40°C	0°C to 40°C
	Operation Humidity	10% to 80%	10% to 80%	10% to 80%
POWER	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type	Built-In Power	Built-In Power	Built-In Power
	Power Typ. / Max.	140 W / 200 W	115 W / 165 W	105 W / 150 W
	Power Consumption Smart Energy Saving	98 W	81 W	74 W
CERTIFICATION	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC
	ErP / Energy Star	N/A / Yes (Energy Star 7.0)	N/A / Yes (Energy Star 7.0)	N/A / Yes (Energy Star 7.0)
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	Yes	Yes	Yes
	External Media Player Attachable	Yes	Yes	Yes
SOFTWARE COMPATIBILITY	Content Management Software	SuperSign CMS	SuperSign CMS	SuperSign CMS
	Control and Monitoring Software	SuperSign Control/Control+	SuperSign Control/Control+	SuperSign Control/Control+
ACCESSORIES	Basic	Remote Controller, Power Cord, QSG, HDMI Cable, Regulation Book, Phone to RS232C Gender	Remote Controller, Power Cord, QSG, HDMI Cable, Regulation Book, Phone to RS232C Gender	Remote Controller, Power Cord, QSG, HDMI Cable, Regulation Book, Phone to RS232C Gender
	Optional	Speaker (SP-5200), Stand (ST-651T), Media Player, Wall Bracket (LSW350B), VESA Adapter (AM-B330S), OPS Kit (KT-OPSA)	Speaker (SP-5200), Stand (ST-201T), Media Player, Wall Bracket (LSW350B), VESA Adapter (AM-B330S), OPS Kit (KT-OPSA)	Speaker (SP-5200), Stand (ST-201T), Media Player, Wall Bracket (LSW350B), VESA Adapter (AM-B330S), OPS Kit (KT-OPSA)

Connessioni



- 1 SPEAKER OUT
- 2 LAN
- 3 HDMI 1
- 4 HDMI 2
- 5 AUDIO IN
- 6 IR & LIGHT SENSOR
- 7 DP IN
- 8 DP OUT
- 9 HDMI 3
- 10 DVI-D IN
- 11 USB 1
- 12 USB 2
- 13 AUDIO OUT
- 14 RS232C IN
- 15 RS232C OUT

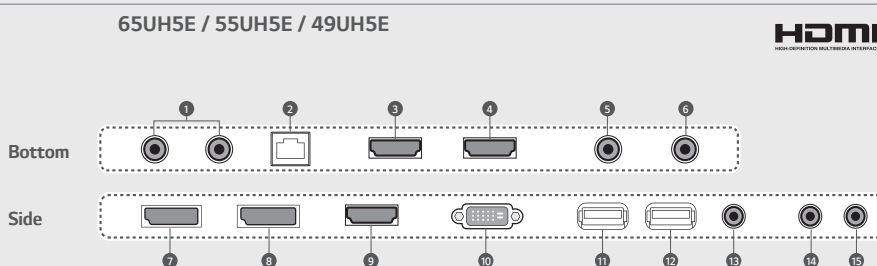

65"

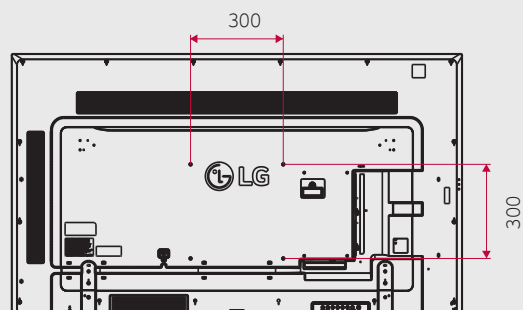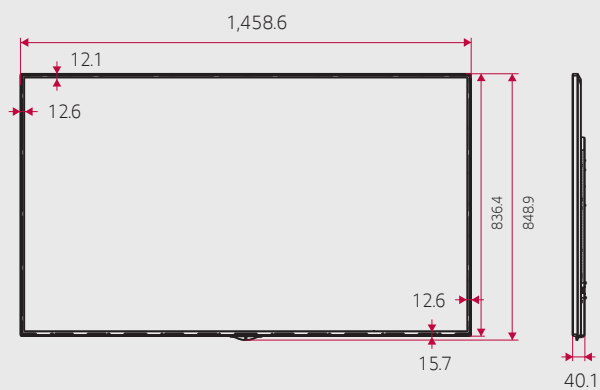

55"

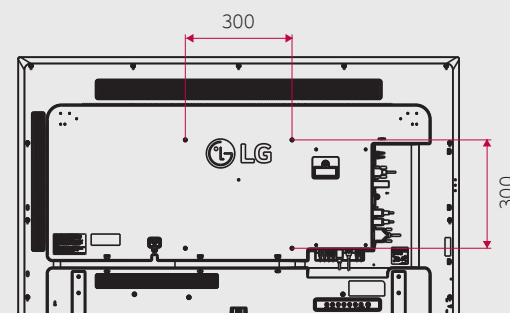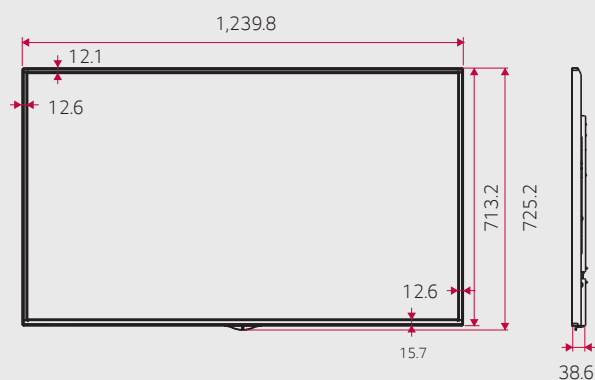

49"

