

		65UH5C	55UH5C	49UH5C
PANEL	Screen Size	65"	55"	49"
	Panel Technology	IPS	IPS	IPS
	Aspect Ratio	16:9	16:9	16:9
	Native Resolution	3,840 x 2,160 (UHD)	3,840 x 2,160 (UHD)	3,840 x 2,160 (UHD)
	Brightness	500 cd/m ²	500 cd/m ²	500 cd/m ²
	Contrast Ratio	1,000:1	1,100:1	1,100:1
	Dynamic CR	1,000,000:1	1,000,000:1	1,000,000:1
	Viewing Angle (H x V)	178 x 178	178 x 178	178 x 178
	Response Time	8ms (G to G)	8ms (G to G)	8ms (G to G)
	Surface Treatment	Low Haze 1%	Low Haze 1%	Low Haze 1%
	Life Time (Min.)	50,000 hours (Typ.)	50,000 hours (Typ.)	50,000 hours (Typ.)
	Operation Hours	24 hours	24 hours	24 hours
CONNECTIVITY	Orientation	Portrait & Landscape	Portrait & Landscape	Portrait & Landscape
	Input	HDMI, DP, DVI-D, Audio, USB 3.0, SD Card		
	Output	DP, Audio, External Speaker Out		
PHYSICAL SPECIFICATION	External Control	RS232C, RJ45, IR Receiver, Pixel Sensor		
	Bezel Color	Black	Black	Black
	Bezel Width	12.1 mm (T), 12.6 mm (R/L), 15.7 mm (B)	12.1 mm (T), 12.6 mm (R/L), 15.7 mm (B)	11.9 mm (T), 12.4 mm (R/L), 15.5 mm (B)
	Monitor Dimension (W x H x D)	1,458.6 x 848.9 x 40.1 mm	1,239.8 x 725.2 x 38.6 mm	1,103.2 x 648.0 x 38.6 mm
	Weight (Head)	26.0 kg	16.6 kg	13.3 kg
	Carton Dimensions (W x H x D)	1,561 x 971 x 190 mm	1,330 x 807 x 170 mm	1,197 x 760 x 166 mm
	Packed Weight	32.5 kg	21.1 kg	17.7 kg
	VESA [®] Standard Mount Interface	300 x 300 mm	300 x 300 mm	300 x 300 mm
SPECIAL FEATURES		Temperature Sensor, Auto Brightness Sensor, Tile Mode (up to 15x15), Natural Mode@Tile Mode, ISM Method, Internal Memory (8GB, System 4GB), Wi-Fi built-in (802.11n), USB Cloning, Content Scheduling, Sync mode, PM mode, Fail Over, Wake on LAN, BEACON (On/Off), Embedded Template, P/P/PBP		
ENVIRONMENT CONDITIONS	Operation Temperature Range	0°C to 40°C	0°C to 40°C	0°C to 40°C
	Operation Humidity Range	10% to 80%	10% to 80%	10% to 80%
POWER	Power Supply	100-240 V~, 50/60 Hz	100-240 V~, 50/60 Hz	100-240 V~, 50/60 Hz
	Power Type	Built-in Power	Built-in Power	Built-in Power
	Power Consumption	134 W	116 W	102 W
	Smart Energy Saving	90 W	80 W	70 W
STANDARD (CERTIFICATION)	Safety	UL / cUL / CB / TUV / KC	UL / cUL / CB / TUV / KC	UL / cUL / CB / TUV / KC
	EMC	FCC Class "A" / CE / KCC	FCC Class "A" / CE / KCC	FCC Class "A" / CE / KCC
	ErP / Energy Star	NA / EPA7.0	NA / EPA7.0	NA / EPA7.0
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	Yes	Yes	Yes
	External Media Player Attachable	Yes (MP500 / MP700)	Yes (MP500 / MP700)	Yes (MP500 / MP700)
SOFTWARE COMPATIBILITY	SuperSign W/Lite	Yes	Yes	Yes
	SuperSign C	Yes	Yes	Yes
ACCESSORIES	Basic	Remote Controller (2ea batteries included), Power cord, QSG, HDMI cable, Regulation book, Phone to RS232C gender, Memory cover	Remote Controller (2ea batteries included), Power cord, QSG, HDMI cable, Regulation book, Phone to RS232C gender, Memory cover	Remote Controller (2ea batteries included), Power cord, QSG, HDMI cable, Regulation book, Phone to RS232C gender, Memory cover
	Optional	Speaker (SP-5200), Stand (ST-651T), Pixel sensor (KT-SPO), Media player, Wall bracket (LSW350B), VESA Adapter (AM-B330S), OPS Kit (KT-OPSA), HD BaseT (EB-B100)	Speaker (SP-5200), Stand (ST-201T), Pixel sensor (KT-SPO), Media player, Wall bracket (LSW350B), VESA Adapter (AM-B330S), OPS Kit (KT-OPSA), HD BaseT (EB-B100)	Speaker (SP-5200), Stand (ST-201T), Pixel sensor (KT-SPO), Media player, Wall bracket (LSW350B), VESA Adapter (AM-B330S), OPS Kit (KT-OPSA), HD BaseT (EB-B100)
	EAN	8806087806311	8806087806038	8806087803624


Conessioni

65UH5C / 55UH5C / 49UH5C

- 1 SPEAKER OUT
- 2 IR & LIGHT SENSOR
- 3 PIXEL SENSOR
- 4 HDMI 1
- 5 HDMI 2
- 6 LAN
- 7 AUDIO IN
- 8 AUDIO OUT
- 9 DVI-D IN
- 10 DP IN
- 11 DP OUT
- 12 SD Card
- 13 USB 3.0
- 14 RS-232C IN
- 15 RS-232C OUT

Bottom



Side

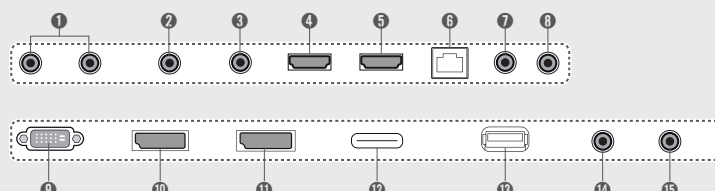

65"

1458.6 x 848.9 x 40.1 / 26.0



Kg

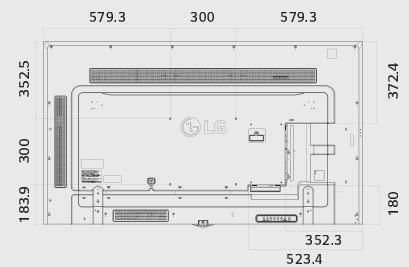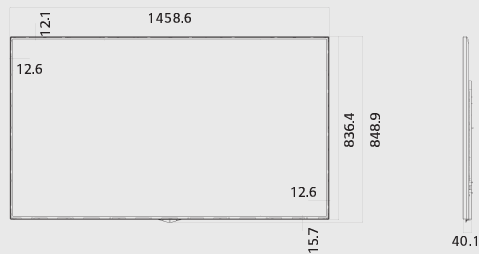

55"

1239.8 x 725.2 x 38.6 /

16.6 kg

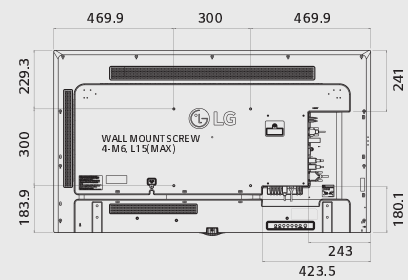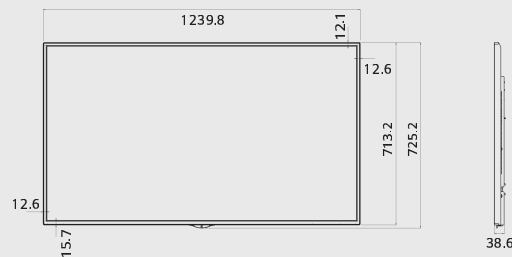

49"

1103.2 x 648 x 38.6 /

13.3 kg

