


		55LS73D	49LS73D	42LS73D
PANEL	Screen Size	55"	49"	42"
	Panel Technology	IPS	IPS	IPS
	Aspect Ratio	16:9	16:9	16:9
	Native Resolution	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)
	Brightness	500cd/m ²	500cd/m ²	500cd/m ²
	Contrast Ratio	1,300:1	1,300:1	1,300:1
	Viewing Angle (H x V)	178 x 178	178 x 178	178 x 178
	Response Time	8ms (G to G BW) typ.	8ms (G to G BW) typ.	8ms (G to G BW) typ.
	Surface Treatment	Hard Coating (3H), Anti-glare treatment of the front polarizer (Haze 10%)	Hard Coating (3H), Anti-glare treatment of the front polarizer (Haze 10%)	Hard Coating (3H), Anti-glare treatment of the front polarizer (Haze 10%)
	Guaranteed Operation Hours	24 Hrs	24 Hrs	24 Hrs
		Portrait & Landscape	Portrait & Landscape	Portrait & Landscape
CONNECTIVITY	Input	HDMI (2), DP, DVI-D, Audio In, OPS, USB 3.0		
	Output	DP, External Speaker Out		
	External Control	RS232C in/out, RJ45, IR / Light Sensor, Pixel Sensor		
PHYSICAL SPECIFICATION	Bezel Color	Black	Black	Black
	Bezel Width	7.4 mm (T/L/R/B even)	7.4 mm (T/L/R/B even)	7.4 mm (T/L/R/B even)
	Monitor Dimension (W x H x D)	1,230 x 714 x 32 mm	1,095 x 637 x 32 mm	949 x 555 x 32 mm
	Weight (Head)	20.7 kg	15.6 kg	12.5kg
	Monitor with Optional Stand Dimensions (W x H x D)	1,230 x 776 x 298 mm	1,095 x 700 x 298 mm	949 x 618 x 298 mm
	Weight (Head+Stand)	22.1 kg	17.0 kg	13.9 kg
	Carton Dimensions (W x H x D)	1,330 x 815 x 174 mm	1,197 x 760 x 134 mm	1,045 x 645 x 127 mm
	Packed Weight	25.2 kg	18.7 kg	14.8 kg
		VESA™ Standard Mount Interface	400 x 400 mm	400 x 400 mm
SPECIAL FEATURES	Temperature Sensor, Auto Brightness Sensor, Tile Mode (up to 15x15), Wake on LAN, DPM Select, DPM Wake Up, Energy Saving, Smart Energy Saving, File Play with USB, PIP/PBP(2), Internal Memory 16GB (System 4GB + Available 12GB), Wi-Fi Dongle Ready (802.11n), USB Cloning, Fail Over			
ENVIRONMENTAL CONDITIONS	Operating Temperature	0°C to 40°C	0°C to 40°C	0°C to 40°C
	Operating Humidity	10% to 80%	10% to 80%	10% to 80%
POWER	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type	Built-In Power	Built-In Power	Built-In Power
	Power Consumption	Typ. 140 W	125 W	110 W
	Smart Energy Saving	100 W	90 W	80 W
STANDARD (CERTIFICATION)	Safety	UL / cUL / CB / TUV / KC	UL / cUL / CB / TUV / KC	UL / cUL / CB / TUV / KC
	EMC	FCC Class "A" / CE / KCC	FCC Class "A" / CE / KCC	FCC Class "A" / CE / KCC
	ErP / Energy Star	NA / Yes (Energy Star 7.0)	NA / Yes (Energy Star 7.0)	NA / Yes (Energy Star 7.0)
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	Yes	Yes	Yes
	External Media Player Attachable	Yes (MP500 / MP700)	Yes (MP500 / MP700)	Yes (MP500 / MP700)
SOFTWARE COMPATIBILITY	Content Management Software	SuperSign Premium	SuperSign Premium	SuperSign Premium
	Control and Monitoring Software	SuperSign C	SuperSign C	SuperSign C
ACCESSORIES	Basic	Remote Controller (2ea batteries included), Power Cord, IR / Light Sensor Receiver, QSG, Regular Book (depend on regional standard), HDMI Cable		
	Optional	SP-2100 (External Speaker), ST-200T, LSW440S, AN-WF500 (Wi-Fi USB Dongle), KT-OPSA (OPS Kits), KT-SP0 (Pixel Sensor)		
EAN		8806087763836	8806087763218	8806087761924



Conessioni

- 1 SPEAKER OUT
- 2 AUDIO IN
- 3 LAN
- 4 PIXEL SENSOR
- 5 HDMI
- 6 IR & LIGHT SENSOR
- 7 DP IN
- 8 DP OUT
- 9 DVI-D IN
- 10 USB 3.0
- 11 RS232C IN
- 12 RS232C OUT

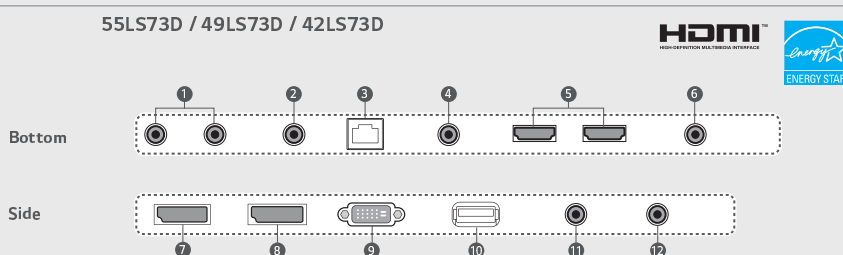



55"

1,230 x 714 x 32 / 20.7 kg

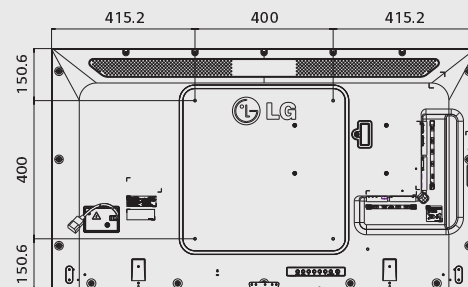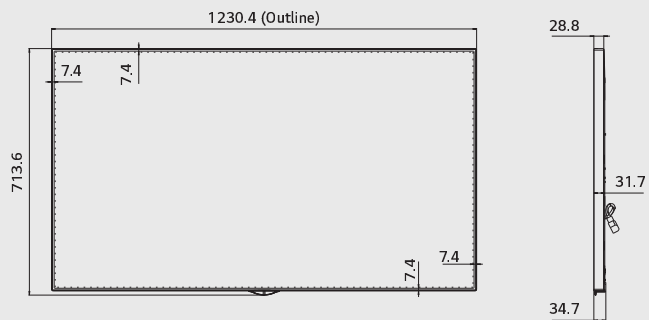

49"

1,095 x 637 x 32 / 15.6 kg

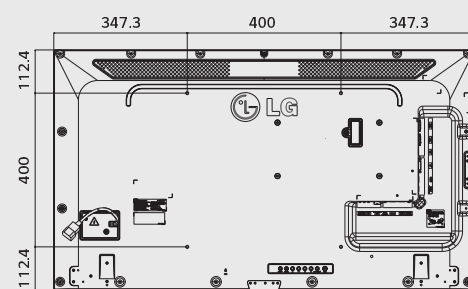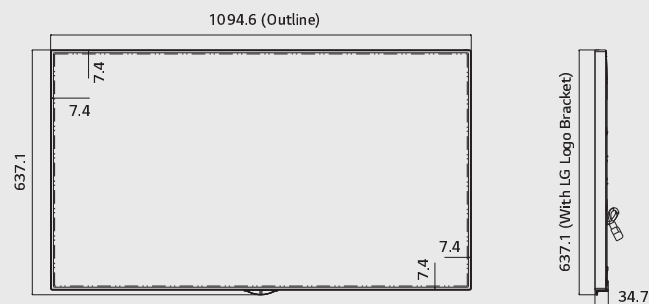

42"

949 x 555 x 32 / 12.5 kg

