




		55LS75C	49LS75C	42LS75C
PANEL	Screen Size	54.64 inches (1387.80mm) diagonal	48.50 inches (1232.00mm) diagonal	41.92 inches (1064.67mm) diagonal
	Panel Technology	IPS	IPS	IPS
	Aspect Ratio	16:9	16:9	16:9
	Native Resolution	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)
	Brightness	700cd/m ²	700cd/m ²	700cd/m ²
	Contrast Ratio	1,300:1	1,300:1	1,300:1
	Viewing Angle (H x V)	178 x 178	178 x 178	178 x 178
	Response Time	1ms (G to G), 8ms (MPRT)	8ms (G to G BW) typ.	8ms (G to G BW) typ.
	Surface Treatment	Hard coating (3H), Anti-glare treatment of the front polarizer (Haze 10%)	Hard coating (3H), Anti-glare treatment of the front polarizer (Haze 10%)	Hard coating (3H), Anti-glare treatment of the front polarizer (Haze 10%)
	Life time (Typ.)	50,000 Hrs min.	50,000 Hrs min.	50,000 Hrs min.
CONNECTIVITY	Input	HDMI (2), DP, DVI-D, Audio in, OPS		
	External Control	RS232C in/out, RJ45, IR / Light sensor, Pixel sensor, USB 3.0		
	Output	DP, External Speaker out		
PHYSICAL SPECIFICATION	Bezel Color	Black	Black	Black
	Bezel Width	7.4 mm (T/L/R/B even)	7.4 mm (T/L/R/B even)	7.4 mm (T/L/R/B even)
	Monitor Dimension (W x H x D)	1,230 x 714 x 32 mm	1,095 x 637 x 32 mm	949 x 555 x 32 mm
	Weight (Head)	20.7 kg	15.6 kg	12.5kg
	Monitor with Optional Stand Dimensions (W x H x D)	1,230 x 776 x 298 mm	1,095 x 700 x 298 mm	949 x 618 x 298 mm
	Weight (Head+Stand)	22.1 kg	17.0 kg	13.9 kg
	Carton Dimensions (W x H x D)	1,330 x 815 x 174 mm	1,197 x 760 x 134 mm	1,045 x 645 x 127 mm
	Packed Weight	25.2 kg	18.7 kg	14.8 kg
SPECIAL FEATURES		Temperature sensor, Auto brightness sensor, Tile Mode, DPM select, DPM wake up, Energy saving, Smart energy saving, File play with USB, PIP/PBP(2), Internal memory 16GB (System 4GB + Available 12GB), Wi-Fi dongle ready (802.11n), USB cloning, Fail over		
ENVIRONMENTAL CONDITIONS	Operating Temperature	0°C to 40°C	0°C to 40°C	0°C to 40°C
	Operating Humidity	10% to 80%	10% to 80%	10% to 80%
POWER	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type	Built-In Power	Built-In Power	Built-In Power
	Power Consumption Typ.	140 W (TBD)	125 W (TBD)	110 W (TBD)
	Power Consumption Smart Energy Saving	100 W (TBD)	90 W (TBD)	80 W (TBD)
STANDARD (CERTIFICATION)	Safety	UL / cUL / CB / TUV / KC	UL / cUL / CB / TUV / KC	UL / cUL / CB / TUV / KC
	EMC	FCC Class "A" / CE / KCC	FCC Class "A" / CE / KCC	FCC Class "A" / CE / KCC
	ErP / Energy Star	NA / Yes (Energy Star 7.0)	NA / Yes (Energy Star 7.0)	NA / NA
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	Yes	Yes	Yes
	External Media Player Attachable	Yes (MP500/MP700)	Yes (MP500/MP700)	Yes (MP500/MP700)
SOFTWARE COMPATIBILITY	SuperSign W/Lite	Yes	Yes	Yes
	SuperSign C	Yes	Yes	Yes
ACCESSORIES	Basic	Remote controller (2ea batteries included), Power cord, IR/Light sensor receiver, QSG, Regular book (depend on regional standard), HDMI cable		
	Optional	SP-2100 (External speaker), ST-200T, LSW440S, AN-WF500 (Wi-Fi USB dongle), KT-OPSA (OPS kits), KT-SP0 (Pixel sensor)		
EAN		8806087821307	8806087817409	8806087816266

Conessioni

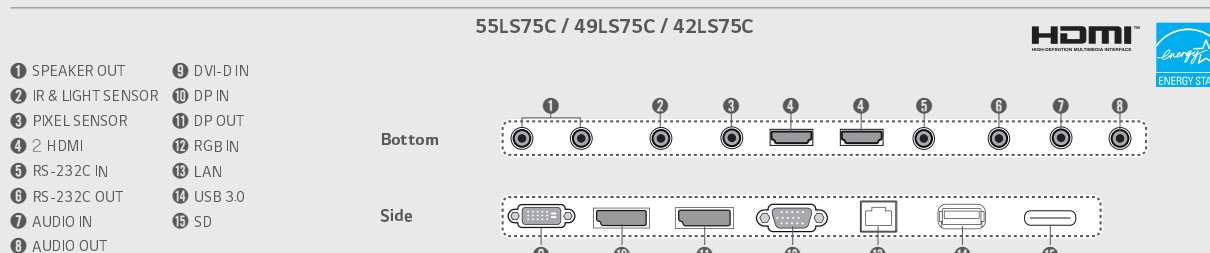



55"

1,230 x 714 x 32 / 20.7 kg

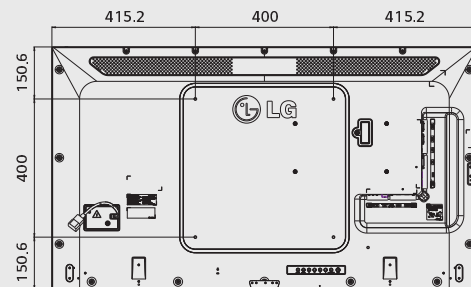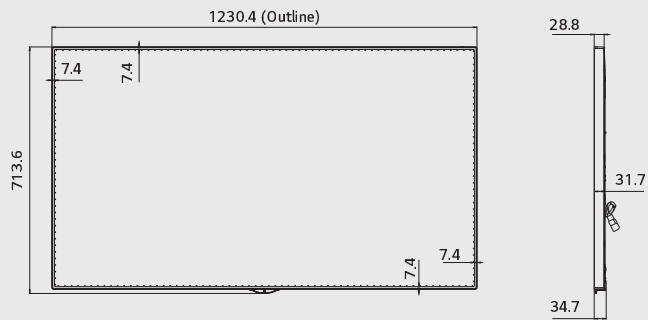

49"

1,095 x 637 x 32 / 15.6 kg

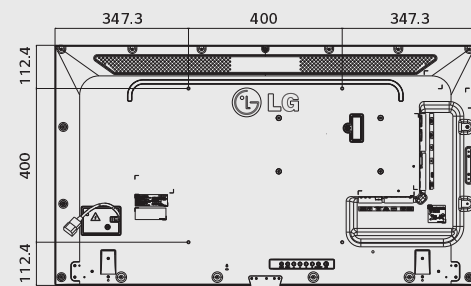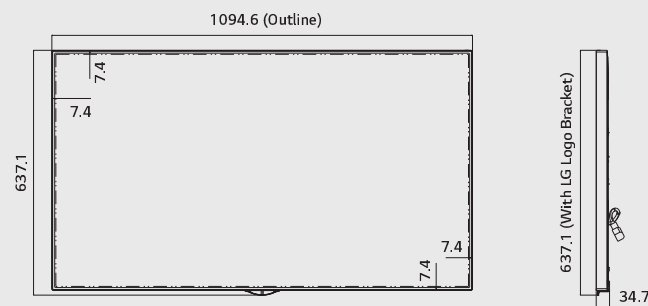

42"

949 x 555 x 32 / 12.5 kg

