



55EF5E	
PANEL	Screen Size
	55"
	Panel Technology
	OLED
	Aspect Ratio
	16 : 9
	Native Resolution
	1,920 x 1,080 (FHD)
	Brightness
	400/150 cd/m ² (APL ¹ 25%/100%)
CONNECTIVITY	Contrast Ratio
	150,000 : 1
	Viewing Angle (H x V)
	178 x 178
PHYSICAL SPECIFICATION	Life Time (Typ.)
	30,000 Hrs
	Operation Hours
	18 Hrs / 7 Days (Moving Video Only)
	Orientation
	Landscape & Portrait
	Input
	HDMI, DP, USB 2.0 (2)
	Output
	DP, Audio (Fixed/Off/Variable)
SPECIAL FEATURES	External Control
	RS232C In/out, RJ45 In/out, IR In
	Bezel Color
	Black
	Bezel Width (T/B/L/R)
	Landscape: 0.6 / 0.6 / 6.7 / 6.7 mm (Flat, Off Bezel) Portrait: 0.6 / 0.6 / 6.7 / 6.7 mm (Flat, Off Bezel) Landscape: 5.0 / 10.6 / 7.6 / 7.6 mm (Flat, On Bezel) Portrait: 5.0 / 5.0 / 7.8 / 13.2 mm (Flat, On Bezel)
	Monitor Dimension (W x H x D)
	Landscape: 1,224.9 x 696.2 x 38.0 mm (Head, w/Pem-nut) Portrait: 701.4 x 1,219.7 x 38.0 mm (Head, w/Pem-nut) Landscape: 1,224.9 x 696.2 x 12.4 mm (Head Only) Portrait: 701.4 x 1,219.7 x 12.4 mm (Head Only) Signage Box: 413 x 353 x 57.3 mm
	Weight
	Landscape: 9.9 kg (Set) Portrait: 9.9 kg (Set) Signage Box: 3.5 kg
ENVIRONMENT CONDITIONS	Carton Dimensions (W x H x D)
	1,350 x 837 x 250 mm
	Packed Weight
	Landscape: 17 kg / Portrait: 17 kg
	Internal Memory (64GB), Temperature Sensor, webOS 3.0+, USB Auto Playback, Local Contents Scheduling, Group Manager, Failover (USB/DP/HDMI/Internal Memory), Content Sync. (RS232C/Local Network), Video Tag(2), OSD/Content Rotation, Gapless Playback, Tile Mode, Setting Data Cloning, Firmware Update by Network, SNMP, ISM Mode, DPM, Wake on LAN, HDMI-CEC ² , Crestron Connected ³
	Operation Temperature
	0°C to 40°C
	Operation Humidity
	10% to 80%
	Power Supply
	100-240V~, 50/60Hz
POWER	Power Type
	Built-In Power
	Power Consumption Typ. / Max.
	309 W ⁴ / 318 W ⁴
CERTIFICATION	Safety
	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC
	FCC Class "A" / CE / KCC
MEDIA PLAYER COMPATIBILITY	ErP / Energy Star
	Yes / No
	OPS Type Compatible
	No
SOFTWARE COMPATIBILITY	External Media Player Attachable
	Yes
	Content Management Software
	SuperSign CMS
ACCESSORIES	Control and Monitoring Software
	SuperSign Control+ / Control
	Basic
	Remote Controller (2 Batteries Included), Power Cord, QSG, IR Receiver, Regulation Book, Phone to RS232C Gender, RS232 Cable (4p-4p), FFC Cables (220mm x 4ea for Connection between Panel and Signage Box), DP Cable, LAN Cable, LC (VLC Cable)
EAN	Optional
	Curvature Calibrator (ACC-CC-EF5E)
	55EF5E-LAEU: 8806098236091
	55EF5E-PAEU: 8806098236169


Connessioni

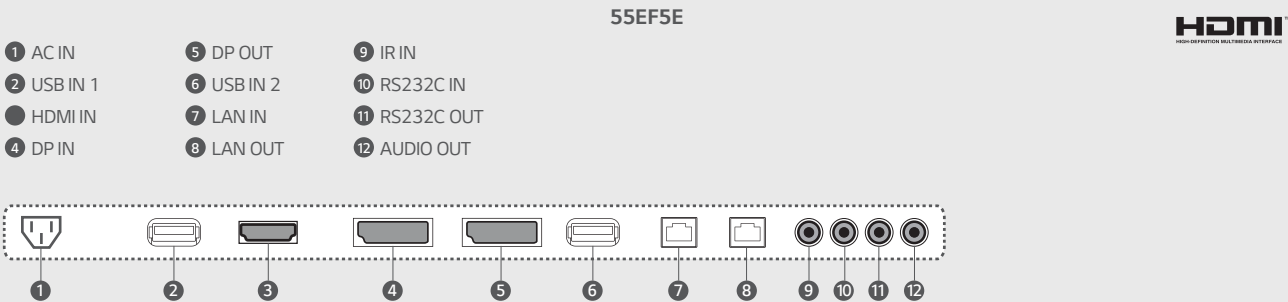

Landscape (Flat, w/ Signage Box)

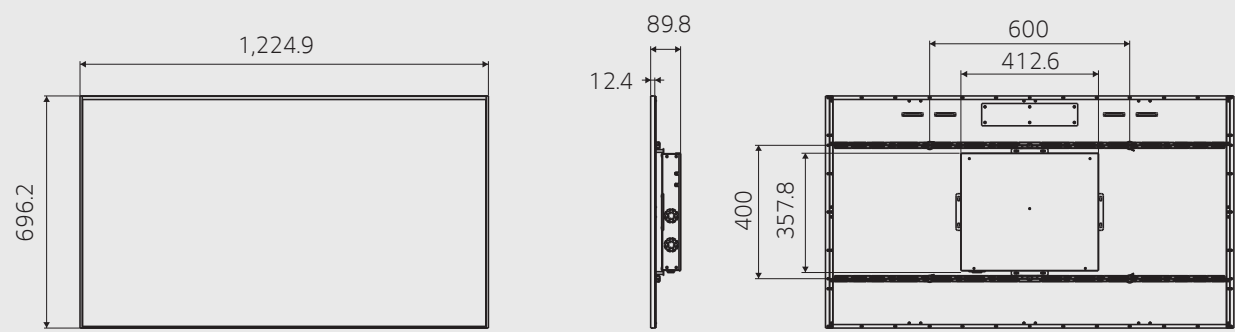

Portrait (Flat, w/ Signage Box)

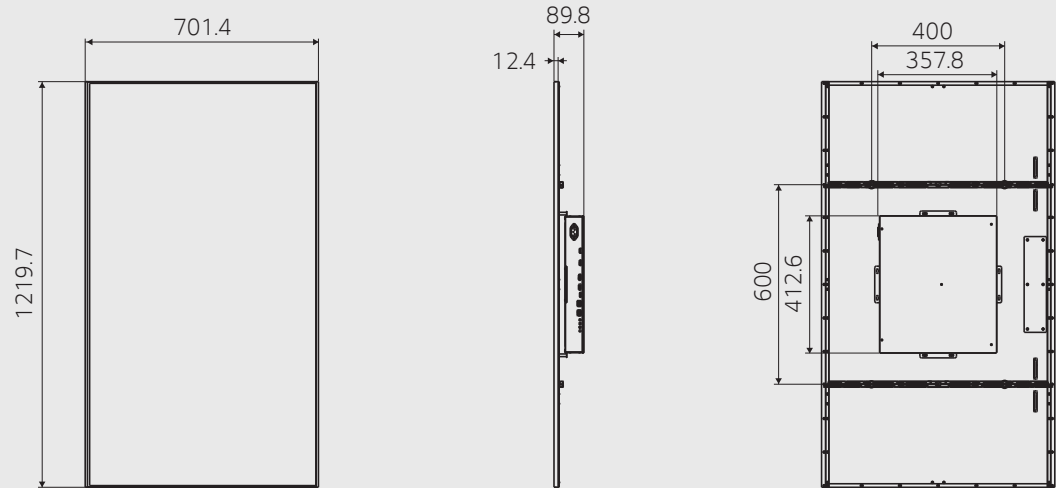

* Dimensions may vary depending on the curvature of the display.