
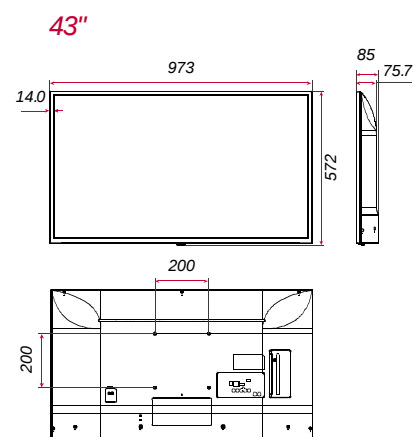
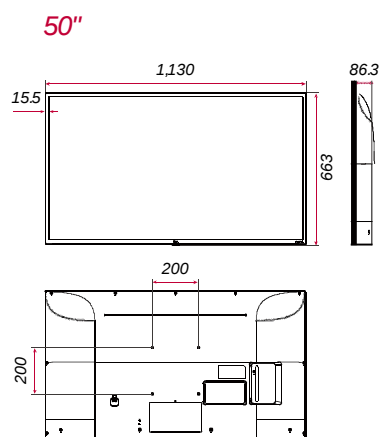
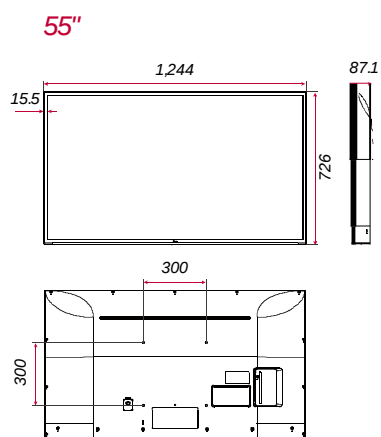
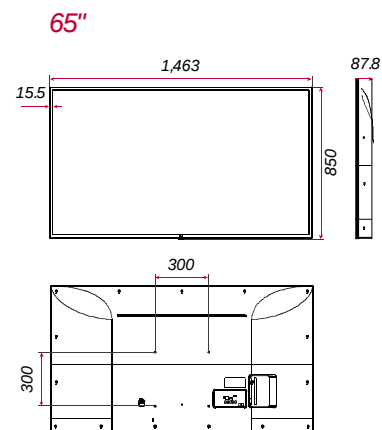
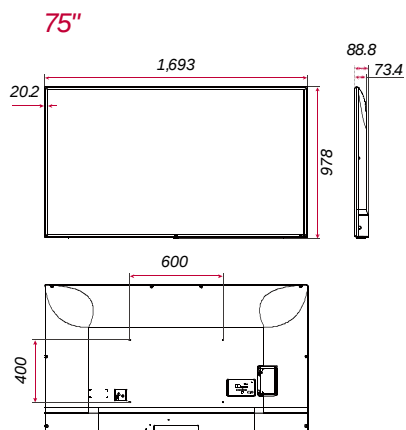



		86UL3G	75UL3G	65UL3G
PANEL	Screen Size	86"	75"	65"
	Panel Technology	IPS	IPS	IPS
	Aspect Ratio	16:9	16:9	16:9
	Native Resolution	3840 x 2160 (UHD)	3840 x 2160 (UHD)	3840 x 2160 (UHD)
	Brightness (Typ.)	350 cd/m ²	350 cd/m ²	400 cd/m ²
	Contrast Ratio	1,400:1	1,200:1	1,200:1
	Viewing Angle (H x V)	178 x 178	178 x 178	178 x 178
	Response Time	5ms (GtG)	8ms (GtG)	8ms (GtG)
	Surface Treatment (Haze)	Haze 3%	Haze 1%	Haze 1%
	Life Time (Typ.)	30,000 Hrs	30,000 Hrs	30,000 Hrs
	Operation Hours	16 Hrs	16 Hrs	16 Hrs
	Orientation	Landscape	Portrait & Landscape	Portrait & Landscape
CONNECTIVITY	Input	HDMI (3), USB 2.0 (2)		
	Output	Audio Out		
	External Control	RS232C In/Out, RJ45 (LAN) In		
MECHANICAL SPECIFICATION	Bezel Color	Dark Meteo Titan	Dark Meteo Titan	Ceramic Black
	Bezel Width	21.9mm (even bezel)	20.2mm (T/R/L), 21.5mm (B)	15.5mm (T/R/L), 22.3mm (B)
	Monitor Dimension (W x H x D)	1943 x 1118 x 77.9mm (93.3mm w/speaker)	1693 x 978 x 73.4mm (88.8mm w/speaker)	1463 x 850 x 87.8mm
	Weight (Head)	44.2 Kg	34.6 Kg	21.3 Kg
	Carton Dimensions (W x H x D)	2116 x 1261 x 285mm	1823 x 1116 x 231mm	1600 x 970 x 190mm
	Packed Weight	59.0 Kg	45.7 Kg	28.4 Kg
	Handle	No	No	No
	VESA Standard Mount Interface	600 x 400	600 x 400	300 x 300
KEY FEATURE		Internal Memory 8GB, Built-in Wi-Fi, Built-in Speaker, Temperature Sensor, Auto Brightness Sensor, Local Key Operation, webOS 4.1, Embedded CMS (Local Contents Scheduling, Group Manager), Fail Over, Image Customization (Bootimg Logo, No Signal), Content Sync (RS232C, Local Network), Screen Share, Video Tag (4), Play via URL, Setting Data Cloning, SNMP, ISM Mode, Crestion Inside, Smart Energy Saving, Wake on LAN, Beacon, HDMI-CEC, SI Server Setting		
SPECIAL FEATURE	Tilt (Max)	N/A	N/A	N/A
	IP Rating	N/A	N/A	N/A
ENVIRONMENTAL CONDITIONS	Operation Temperature	0 °C to 40 °C	0 °C to 40 °C	0 °C to 40 °C
	Operation Humidity	10 % to 80 %	10 % to 80 %	10 % to 80 %
POWER	Power Supply	AC 100-240V~, 50/60Hz	AC 100-240V~, 50/60Hz	AC 100-240V~, 50/60Hz
	Power Type	Built-In Power	Built-In Power	Built-In Power
	Power Consumption (Typ. / Max.)	240W / 325W	155W / 240W	130W / 185W
	Smart Energy Saving	168W	108.5W	91W
SOUND	Speaker	Built-in	Built-in	Built-in
CERTIFICATION	Safety	CB	CB	CB
	EMC	FCC Class "A" / CE	FCC Class "A" / CE	FCC Class "A" / CE
	ErP / Energy Star	Yes / No	Yes / No	Yes / No
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	No	No	No
	External Media Player Attachable	No	No	No
SOFTWARE COMPATIBILITY	Content Management Software	SuperSign CMS	SuperSign CMS	SuperSign CMS
	Control and Monitoring Software	SuperSign Control / Control+	SuperSign Control / Control+	SuperSign Control / Control+
	Signage 365 Care	Yes	Yes	Yes
ACCESSORIES	Basic	Remote Controller(include battery 2ea), Power Cord, Regulation Book, Phone to D-Sub9 Gender, Stand, Cable Holder		
	Optional	N/A		

		55UL3G	50UL3G	43UL3G
PANEL	Screen Size	55"	50"	43"
	Panel Technology	IPS	IPS	IPS
	Aspect Ratio	16:9	16:9	16:9
	Native Resolution	3840 x 2160 (UHD)	3840 x 2160 (UHD)	3840 x 2160 (UHD)
	Brightness (Typ.)	400 cd/m ²	350 cd/m ²	300 cd/m ²
	Contrast Ratio	1,200:1	5,000:1	1,200:1
	Viewing Angle (H x V)	178 x 178	178 x 178	178 x 178
	Response Time	8ms (GtG)	9.5ms (GtG)	8ms (GtG)
	Surface Treatment (Haze)	Haze 1%	Haze 1%	Haze 1%
	Life Time (Typ.)	30,000 Hrs	30,000 Hrs	30,000 Hrs
	Operation Hours	16 Hrs	16 Hrs	16 Hrs
	Orientation	Portrait & Landscape	Portrait & Landscape	Portrait & Landscape
CONNECTIVITY	Input	HDMI (3), USB 2.0 (2)		
	Output	Audio Out		
	External Control	RS232C In/Out, RJ45 (LAN) In		
MECHANICAL SPECIFICATION	Bezel Color	Ceramic Black	Ceramic Black	Ceramic Black
	Bezel Width	15.5mm (T/R/L), 22.3mm (B)	15.5mm (T/R/L), 22.3mm (B)	14.0mm (T/R/L), 20.2mm (B)
	Monitor Dimension (W x H x D)	1244 x 726 x 87.1mm	1130 X 663 x 86.3mm	973 X 572 x 85.0mm
	Weight (Head)	14.3 Kg	11.3 Kg	8.0 Kg
	Carton Dimensions (W x H x D)	1360 x 835 x 175mm	1215 x 775 x 175mm	1060 x 660 x 152mm
	Packed Weight	19.5 Kg	14.3 Kg	10.2 Kg
	Handle	No	No	No
	VESA™ Standard Mount Interface	300 x 300	200 x 200	200 x 200
KEY FEATURE		Internal Memory 8GB, Built-in Wi-Fi, Built-in Speaker, Temperature Sensor, Auto Brightness Sensor, Local Key Operation, webOS 4.1, Embedded CMS (Local Contents Scheduling, Group Manager), Fail Over, Image Customization (Bootting Logo, No Signal), Content Sync (RS232C, Local Network), Screen Share, Video Tag (4), Play via URL, Setting Data Cloning, SNMP, ISM Mode, Crestron Inside, Smart Energy Saving, Wake on LAN, Beacon, HDMI-CEC, SI Server Setting		
SPECIAL FEATURE	Tilt (Max)	N/A	N/A	N/A
	IP Rating	N/A	N/A	N/A
ENVIRONMENTAL CONDITIONS	Operation Temperature	0 °C to 40 °C	0 °C to 40 °C	0 °C to 40 °C
	Operation Humidity	10 % to 80 %	10 % to 80 %	10 % to 80 %
POWER	Power Supply	AC 100-240V~, 50/60Hz	AC 100-240V~, 50/60Hz	AC 100-240V~, 50/60Hz
	Power Type	Built-In Power	Built-In Power	Built-In Power
	Power Consumption (Typ. / Max.)	105W / 155W	105W / 150W	80W / 115W
	Smart Energy Saving	73.5W	73.5W	56W
SOUND	Speaker	Built-in	Built-in	Built-in
CERTIFICATION	Safety	CB	CB	CB
	EMC	FCC Class "A" / CE	FCC Class "A" / CE	FCC Class "A" / CE
	ErP / Energy Star	Yes / No	Yes / No	Yes / No
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	No	No	No
	External Media Player Attachable	No	No	No
SOFTWARE COMPATIBILITY	Content Management Software	SuperSign CMS	SuperSign CMS	SuperSign CMS
	Control and Monitoring Software	SuperSign Control / Control+	SuperSign Control / Control+	SuperSign Control / Control+
	Signage 365 Care	Yes	Yes	Yes
ACCESSORIES	Basic	Remote Controller(include battery 2ea), Power Cord, Regulation Book, Phone to D-Sub9 Gender, Stand, Cable Holder		
	Optional	N/A		

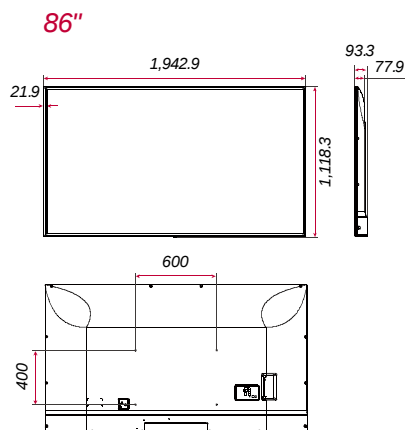

UL3G | Connessioni

Rear

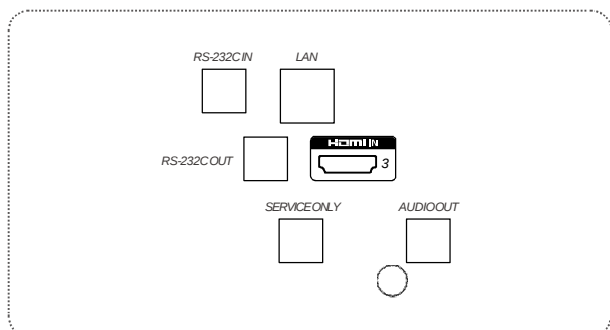

Side



* Dimensions & Jack Panels may differ from the above image, so please contact LG sales team to verify before ordering.