



DIMENSIONS (unit: mm)

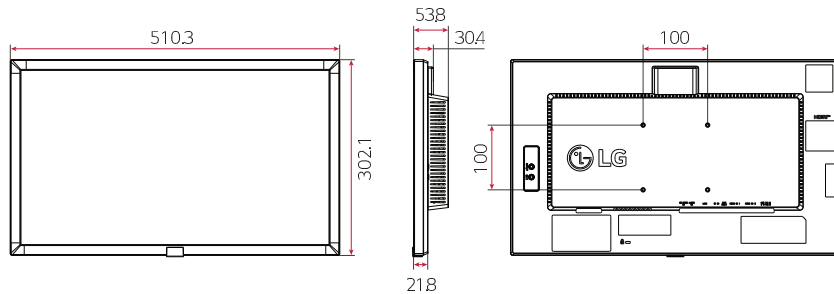

CONNECTIVITY



- 1 RS-232C IN 5 SVC ONLY
- 2 AUDIO IN 6 HDMI IN 1
- 3 LAN 7 HDMI IN 2
- 4 IR IN 8 USB 2.0 IN

SPECIFICATION

22SM3G

Panel	Screen Size	21.5"
	Panel Technology	IPS
	Aspect Ratio	16 : 9
	Native Resolution	1,920 x 1,080 (FHD)
	Refresh Rate	60 Hz
	Brightness (Typ.)	250 cd/m²
	Contrast Ratio	1,000 : 1
	Viewing Angle (H x V)	178 x 178
	Response Time	14ms (G to G)
	Surface Treatment (Haze)	25 %
	Life Time (Min.)	30,000 Hrs
	Operation Hours (Hours / Day)	16 / 7
	Portrait / Landscape	No / Yes
Connectivity	Input	HDMI (2, HDCP 2.2), USB 2.0, Type A, Audio In
	Output	-
	External Control	RS-232C In (Phone-jack), RJ45 (LAN) In, IR In
Mechanical Specification	Bezel Color	Black
	Bezel Width	16.3 mm (Even Bezel)
	Weight (Head)	3.34 kg
	Packed Weight	4.74 kg
	Monitor Dimensions (W x H x D)	510.3 x 302.1 x 53.8 mm
	Carton Dimensions (W x H x D)	565.0 x 357.0 x 103.0 mm
	Handle	No
	VESA™ Standard Mount Interface	100 x 100 mm
Key Feature	Internal Memory 8GB, Built-in Wi-Fi, Temperature Sensor, Local Key Operation, Embedded CMS (Local Contents Scheduling, Group Manager), USB Plug & Play, Fail Over, Background Image (Booting Logo Image, No Signal Image), PIP, PBP (2), Screen Share, Play via URL, Setting Data Cloning, SNMP, ISM (Image Sticking Minimization) Method, Control Manager, Crestron Connected ¹⁾ , Smart Energy Saving, PM Mode, Wake on LAN, Beacon, HDMI-CEC ²⁾ , SI Server Setting, webRTC, ProIdiom	
Environment Conditions	Operation Temperature	0 °C to 40 °C
	Operation Humidity	10 % to 80 %
Power	Power Supply	AC 100-240 V~, 50 / 60 Hz
	Power Type	Built-In Power
	Power Consumption	Typ. / Max. 30 W / 33 W Smart Energy Saving 1.5 W ± 5 %
Sound	Speaker	Yes (1 W x 2 ea)
Certification	Safety	CB / NRTL
	EMC	FCC Class "A" / CE
	ErP / Energy Star	Yes (EU Only) / No
	ePEAT (US Only)	No
OPS Compatibility	OPS Type Compatible	No
	OPS Power Built-In	No
Software Compatibility	Content Management Software	SuperSign CMS
	Control and Monitoring Software	SuperSign Control / Control+
	Signage 365 Care ³⁾	Yes
Accessories	Basic	Remote Controller, Power Cord, QSG, HDMI Cable, Phone to RS-232C Gender, External IR, IR Sheet

* Dimensions & Jack Panels (Rear/Side) may differ from the above image, so please contact LG sales team to verify before ordering.

1) Network based control 2) Compatibility may differ by equipment 3) The availability of the "Signage365Care" service differs by region.



Download
LG C-Display+
Mobile App
Google Play Store

www.lg.com/b2b

www.youtube.com/c/LGCommercialDisplay

www.facebook.com/LGInformationDisplay

www.linkedin.com/company/lginformationdisplay

LG may make changes to specifications and product descriptions without notice.
Copyright © 2020 LG Electronics Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp.
The names of products and brands mentioned here may be the trademarks of their respective owners.

