


		98LS95D
PANEL	Screen Size	98"
	Panel Technology	IPS
	Aspect Ratio	16:9
	Native Resolution	3,840 x 2,160 (UHD)
	Brightness	500cd/m ² (Typ)
	Contrast Ratio	1,300:1
	Viewing Angle (H x V)	178 x 178
	Response Time	8ms (G to G BW) typ.
	Surface Treatment	Hard coating (3H), Anti-glare treatment of the front polarizer (Haze 1% (Typ.))
	Operation Hours	24 hrs
CONNECTIVITY	Orientation	Landscape & Portrait
	Input	HDMI (3), DP, DVI-D, Audio in
	Output	DP, Audio out, External speaker out
	External Control	RS232C in/out, RJ45, IR receiver, Pixel sensor, USB 3.0, USB 2.0, SD card
PHYSICAL SPECIFICATION	Bezel Color	Black
	Bezel Width	14.9 mm (Even bezel)
	Monitor Dimension (W x H x D)	2,191.8 x 1,246.8 x 69.4 mm
	Weight	88 kg
	Carton Dimensions (W x H x D)	2,342 x 1,386 x 402 mm
	Packed Weight	123 kg
	Handle	No
VESA™ Standard Mount Interface		800 x 400 mm
SPECIAL FEATURES		Temperature sensor, Auto brightness sensor, Tile mode (up to 15x15), Natural mode @ Tile mode, DPM select, DPM wake up, Energy saving, Smart Energy saving, File play with USB, PIP/PBP (2, 3, 4), Internal memory (8 GB), USB cloning, Fail over, Mirroring, SoftAP, Beacon, DP daisy chain
ENVIRONMENT CONDITIONS	Operation Temperature	0°C to 40°C
	Operation Humidity	10% to 80%
POWER	Power Supply	100-240 V~, 50/60 Hz
	Power Type	Built-In Power
	Power Consumption Typ./Max	450 W
	Smart Energy Saving	315 W
STANDARD (CERTIFICATION)	Safety	UL / cUL / CB / TUV / KC
	EMC	FCC Class "A" / CE / KCC
	ErP / Energy Star / CEL	No / No / Yes
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	No
	External Media player Attachable	Yes (MP500/MP700)
SOFTWARE COMPATIBILITY	SuperSign W/Lite	Yes
	SuperSign C	Yes
ACCESSORIES	Basic	Remote controller (include battery 2ea), Power cord, IR/Light sensor receiver, CD (Owner's manual, SuperSign program / Manual), HDMI 2.0 cable, DP cable, RS232C, Wi-Fi dongle, Eye bolt
	Optional	SP-2200 (External speaker)
EAN		8806084842015

Conessioni

- 1 SPEAKER OUT
- 2 LAN
- 3 AUDIO IN
- 4 AUDIO OUT
- 5 DPOUT
- 6 DVI-D IN
- 7 PIXEL SENSOR
- 8 IR & LIGHT SENSOR
- 9 DP IN
- 10 HDMI IN
- 11 USB 3.0
- 12 SD CARD
- 13 RS-232C IN
- 14 RS-232C OUT
- 15 USB 2.0

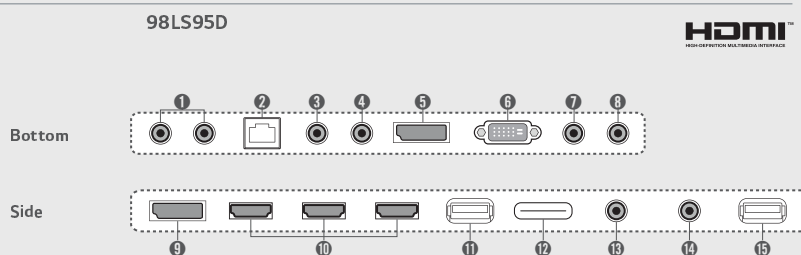

98"

2,191.8 x 1,246.8 x 69.4 / 88 kg

