


88BH7D		
PANEL	Screen Size	88"
	Panel Technology	IPS
	Aspect Ratio	32:9
	Native Resolution	3,840 x 1,080 (UHD)
	Brightness	700 cd/m ² (Typ)
	Contrast Ratio	1,100:1 (Typ)
	Dynamic CR	500,000:1 (Typ)
	Viewing Angle(H x V)	178 x 178
	Color Depth	1 ms (G to G), 8 ms (MPRT)
	Response Time	8ms(G to G BW) typ.
	Surface Treatment	AGLR (Haze 3%)
CONNECTIVITY	Orientation	Landscape & Portrait Mode
	Input	HDMI (3), DP, OPS, DVI-D, Analog Audio, USB 2.0, USB 3.0, SD Card
	Output	DP, Analog Audio
PHYSICAL SPECIFICATION	External Control	RS232C In/Out, RJ45 In/Out, IR+B Receiver, Pixel Sensor
	Bezel Color	Black
	Bezel Width	4.4 mm (L/R), 5.9 mm (U/D)
	Monitor Dimension (W x H x D)	2,158.3 x 611.2 x 84.8 mm
	Weight (Head)	38 kg
	Carton Dimensions (W x H x D)	2,274 x 717 x 212 mm
	Packed Weight	51 kg (Pallet included)
	Handle	Yes
	VESA™ Standard Mount Interface	600 x 400 mm
SPECIAL FEATURES		
Temperature Sensor, Auto Brightness Sensor, Tile Mode, Natural Mode@Tile Mode, ISM Method, DPM Select, Energy Saving, Smart Energy Saving, File Play with USB/SD/Internal Memory, PIP/PBP, 8GB (System 4GB + Available 4GB), Wi-Fi Dongle Ready, 4K Up Scaling		
ENVIRONMENT CONDITIONS	Operation Temperature Range	0 °C to 40 °C
	Operation Humidity Range	10 % to 80 %
POWER	Power Supply	100-240V~, 50/60Hz
	Power Type	Built-In Power
	Power Typ. / Max.	500 W / 550 W
	Consumption Smart Energy Saving	30% of typical
STANDARD (CERTIFICATION)	Safety	UL / cUL / CB / TUV / KC
	EMC	FCC Class "A" / CE / KC
	Energy	NA / CEL
MEDIA PLAYER COMPATIBILITY	OPS PC compatible (optional)	Yes
	External Media player Attatchable	No
SOFTWARE COMPATIBILITY	Content Management Software	SuperSign Premium
	Control and Monitoring Software	SuperSign C
ACCESSORY	Basic	Remote Controller (including battery 2ea), Power Cord, DP (2.6M), RS-232C Cable (3M), Owner's Manual (Website upload)
	Optional	AN-WF500 (Wi-Fi USB Dongle), MP700, KT-OPSA (OPS KIT), KT-SP0 (RGB Sensor) ** Stand is not available
EAN		8806087764338

Conessioni

88BH7D

- 1 IR & LIGHT SENSOR
- 2 RS-232C In
- 3 RS-232C Out
- 4 AUDIO In
- 5 AUDIO Out
- 6 DP Out
- 7 DP In
- 8 DVI-D In
- 9 HDMI 1.4
- 10 HDMI 2.0
- 11 USB 2.0
- 12 USB 3.0
- 13 SD Card
- 14 LAN In
- 15 LAN Out
- 16 Pixel Sensor

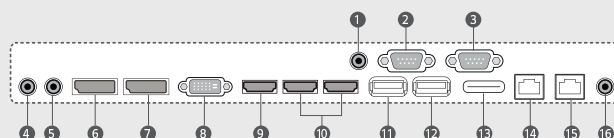

88"

2,158.3 x 611.2 x 84.8 mm / 38 kg

