


		65SE3KD	55SE3KD	49SE3KD	43SE3KD	32SE3KD
PANEL	Screen Size	65"	55"	49"	43"	32"
	Panel Technology	IPS (PD)				
	Aspect Ratio	16:9				
	Native Resolution	1,920 x 1,080 (FHD)				
	Brightness	400 cd/m ²	350 cd/m ²			
	Contrast Ratio	1,300:1	1,100:1			
	Dynamic CR	500,000:1				
	Viewing Angle (H x V)	178 x 178				
	Response Time	10 ms (G to G), 8 ms (MPRT)	12 ms (G to G BW), 9 ms (WOT)	12 ms (G to G BW), 10.1 ms (WOT)	12 ms (G to G BW), 9.4 ms (WOT)	10 ms (G to G BW), 7.1 ms (WOT)
	Surface Treatment	Hard coating (3H), Anti-glare treatment of the front polarizer (Haze 1 % (Typ.))				
Guaranteed Operating Hour	18 Hours					
Orientation	Landscape & Portrait					
CONNECTIVITY	Input	HDMI (2), DVI, RGB, Audio, USB				
	Output	Audio				
	External Control	RS232C (In/Out), RJ45, IR Receiver				
PHYSICAL SPECIFICATION	Bezel Color	Black				
	Bezel Width	11.9 mm (T/R/L), 18 mm (B)				13 mm (T/R/L), 18 mm (B)
	Monitor Dimensions (W x H x D)	1,456.9 x 838 x 56.5 mm	1,238 x 714.9 x 54 mm	1,102.2 x 638.5 x 54 mm	969.6 x 563.9 x 54 mm	729.4 x 428.9 x 55.5 mm
	Weight (Head)	27.9 kg	17.5 kg	14.3 kg	10 kg	5.4 kg
	Weight (Head + Stand)	33.1 kg	20.8 kg	17.6 kg	12.5 kg	6.2 kg
	Monitor with Optional Stand Dimensions (W x H x D)	1,456.9 x 898.1 x 293.7 mm	1,238 x 773.4 x 219.6 mm	1,102.2 x 696.8 x 219.6 mm	969.6 x 622.2 x 193 mm	729.4 x 481 x 154.2 mm
	Carton Dimensions (W x H x D)	1,561 x 977 x 190 mm	1,330 x 807 x 170 mm	1,197 x 760 x 166 mm	1,052 x 650 x 123 mm	810 x 510 x 132 mm
	Packed Weight	33.8 kg	21.7 kg	17.4 kg	12.6 kg	6.7kg
	VESA™ Standard Mount Interface	300 x 300 mm				200 x 200 mm
	SPECIAL FEATURES	USB Content Scheduling, Conformal Coating, SNMP Support, Wi-Fi Ready (Dongle), Power Management Modes (Sustain Aspect Ratio / Stand-by Screen, etc.), No Signal Image setting, Enhanced ISM (Image Sticking Minimization) Mode, Holiday Schedule / Local Time Auto Setting, Fail-over (USB, RGB, DVI, HDMI), Wake on LAN				
ENVIRONMENTAL CONDITIONS	Operating Temperature Range	0 °C to 40 °C	0 °C to 40 °C	0 °C to 40 °C	0 °C to 40 °C	0 °C to 40 °C
	Operating Humidity Range	10 % to 80 %	10 % to 80 %	10 % to 80 %	10 % to 80 %	10 % to 80 %
POWER	Power Supply	100-240V~, 50/60Hz				
	Power Type	Built-In Power				
POWER CONSUMPTION	Typ.	95 W	70 W	65 W	60 W	50 W
	Smart Energy Saving	70 W	55 W	50 W	45 W	35 W
AUDIO POWER		20 W (10 W x 2) for Internal Speaker (6 ohm)				
STANDARD (CERTIFICATION)	Safety	UL / cUL / CB / TUV / KC				
	EMC	FCC Class "A" / CE / KCC				
	ErP / Energy Star	NA / Yes (Energy Star 7.0)				
MEDIA PLAYER COMPATIBILITY	External Media Player Attachable	Yes (MP500 / MP700)	Yes (MP500 / MP700)	Yes (MP500 / MP700)	Yes (MP500 / MP700)	No
SOFTWARE COMPATIBILITY	SuperSign W / Lite	Yes				
	SuperSign C	Yes				
	Basic	Remote Controller (2 batteries included), Power Cord, QSG, RGB Cable, Regulation Book, Phone to RS232C Gender				
ACCESSORIES	Optional	Stand (ST-652T), Media Player, Wall Bracket (LSW350B), VESA Adapter (AM-B330S)	Stand (ST-492T), Media Player, Wall Bracket (LSW350B), VESA Adapter (AM-B330S)	Stand (ST-492T), Media Player, Wall Bracket (LSW350B), VESA Adapter (AM-B330S)	Stand (ST-432T), Media Player, Wall Bracket (LSW230B), VESA Adapter (AM-B220S)	Stand (ST-322T), Wall Bracket (LSW230B)
EAN		8806087866322	8806087764079	8806087763379	8806087762105	8806087760200

Connessioni


- ① RS-232C IN
- ② RS-232C OUT
- ③ AUDIO IN
- ④ AUDIO OUT
- ⑤ EXT IR IN
- ⑥ HDMI in 1
- ⑦ HDMI in 2
- ⑧ DVI-D IN
- ⑨ LAN
- ⑩ RGB IN
- ⑪ USB



65SE3KD


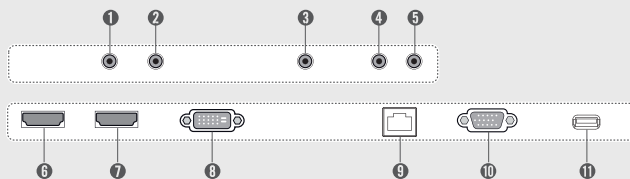


55SE3KD / 49SE3KD / 43SE3KD / 32SE3KD

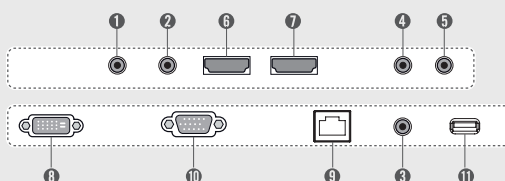



65"

1,456.9 x 838 x 56.5 /
27.9 kg

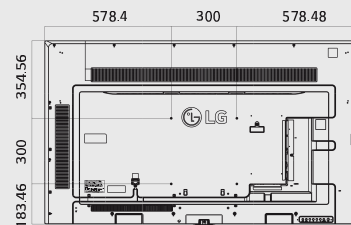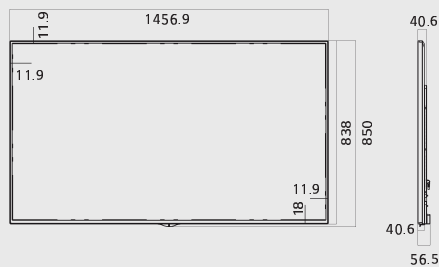



55"

1,238 x 714.9 x 54 /
17.5 kg

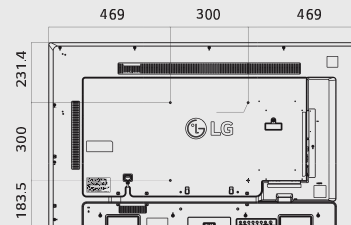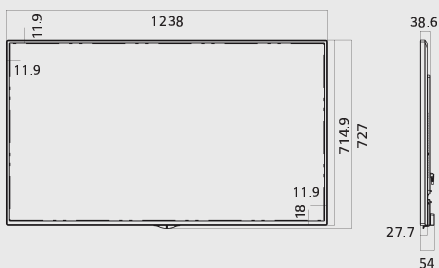



49"

1,102.2 x 638.5 x 54 /
14.3 kg

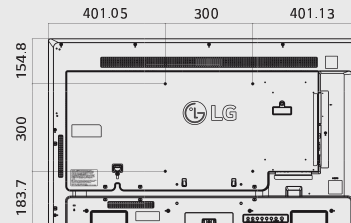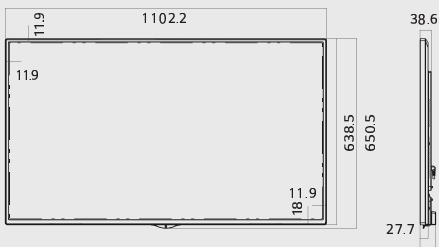

43"

969.6 x 563.9 x 54 /
10 kg

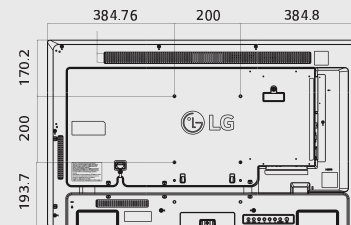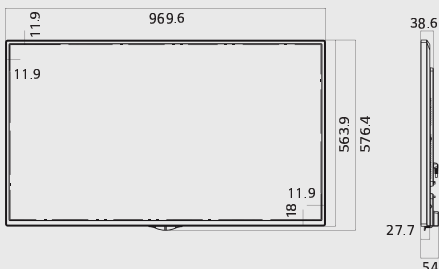

32"

729.4 x 428.9 x 55.5 /
5.4 kg

