


		55SE3KE	49SE3KE	43SE3KE	32SE3KE
PANEL	Screen Size	55"	49"	43"	32"
	Panel Technology	IPS	IPS	IPS	IPS
	Aspect Ratio	16 : 9	16 : 9	16 : 9	16 : 9
	Native Resolution	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)
	Brightness	350 cd/m ²	350 cd/m ²	350 cd/m ²	350 cd/m ²
	Contrast Ratio	1,100:1	1,100:1	1,100:1	1,100:1
	Viewing Angle (H x V)	178 x 178	178 x 178	178 x 178	178 x 178
	Response Time	12 ms (G to G BW), 9.0 ms (WOT)	12 ms (G to G BW), 10.1 ms (WOT)	12 ms (G to G BW), 9.4 ms (WOT)	10 ms (G to G BW), 7.1 ms (WOT)
	Surface Treatment (Haze)	AGP Haze 1%	AGP Haze 1%	AGP Haze 1%	AGP Haze 1%
	Life Time (Typ.)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
CONNECTIVITY	Guaranteed Operating Hours	18 Hrs	18 Hrs	18 Hrs	18 Hrs
	Orientation	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait
	Input	HDMI (2), DVI-D, RGB, Audio, USB	HDMI (2), DVI-D, RGB, Audio, USB	HDMI (2), DVI-D, RGB, Audio, USB	HDMI (2), DVI-D, RGB, Audio, USB
	Output	Audio (Off/Fixed/Variable)	Audio (Off/Fixed/Variable)	Audio (Off/Fixed/Variable)	Audio (Off/Fixed/Variable)
MECHANICAL SPECIFICATION	External Control	RS232C In/out, RJ45 In, IR In	RS232C In/out, RJ45 In, IR In	RS232C In/out, RJ45 In, IR In	RS232C In/out, RJ45 In, IR In
	Bezel Color	Black	Black	Black	Black
	Bezel Width	11.9 mm (T/R/L), 18 mm (B)	11.9 mm (T/R/L), 18 mm (B)	11.9 mm (T/R/L), 18 mm (B)	13 mm (T/R/L), 18 mm (B)
	Monitor Dimension (W x H x D)	1,238 x 714.9 x 54 mm	1,102.2 x 638.5 x 54 mm	969.6 x 563.9 x 54 mm	729.4 x 428.9 x 55.5 mm
	Weight (Head)	17.5 kg	14.3 kg	10.0 kg	5.4 kg
	Monitor with Optional Stand Dimensions (W x H x D)	1,238 x 773.4 x 219.6 mm	1,102.2 x 696.8 x 219.6 mm	969.6 x 622.2 x 193 mm	729.4 x 481 x 154.2 mm
	Weight (Head+Stand)	20.8 kg	17.6 kg	12.5 kg	6.2 kg
	Carton Dimensions (W x H x D)	1,330 x 807 x 170 mm	1,197 x 760 x 166 mm	1,052 x 650 x 123 mm	810 x 510 x 132 mm
	Packed Weight	21.7 kg	17.4 kg	12.6 kg	6.7 kg
	VESA™ Standard Mount Interface	300 x 300 mm	300 x 300 mm	200 x 200 mm	200 x 200 mm
KEY FEATURE		Wi-Fi Dongle Ready, Temperature Sensor, Local Key Operation, USB Auto Playback, Local Contents Scheduling, Fail Over, Image Customization (Booting Logo/No Signal), Content Sync. (RS232C/Local Network), SNMP (ver.2), ISM Mode, Crestron Connected ^{*)} , DPM, PM Mode, Wake on LAN, Energy Saving, Smart Energy Saving, HDMI-CEC ²			
ENVIRONMENTAL CONDITIONS	Operation Temperature	0°C to 40°C	0°C to 40°C	0°C to 40°C	0°C to 40°C
	Operation Humidity	10% to 80%	10% to 80%	10% to 80%	10% to 80%
POWER	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz	100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type	Built-In Power	Built-In Power	Built-In Power	Built-In Power
	Power Typ. / Max.	65 W / 100 W	60 W / 95 W	55 W / 90 W	45 W / 80 W
	Consumption Smart Energy Saving	45.5 W	42 W	38.5 W	31.5 W
SOUND	Speaker	20 W (10 W x 2)	20 W (10 W x 2)	20 W (10 W x 2)	20 W (10 W x 2)
CERTIFICATION	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC
	ErP / Energy Star	Yes ³ / Yes (Energy Star 7.0)	Yes ³ / Yes (Energy Star 7.0)	Yes ³ / Yes (Energy Star 7.0)	Yes ³ / Yes (Energy Star 7.0)
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	Yes	Yes	Yes	Yes
	External Media Player Attachable	Yes (MP500 / MP700)	Yes (MP500 / MP700)	Yes (MP500 / MP700)	Yes (MP500 / MP700)
SOFTWARE COMPATIBILITY	Content Management Software	SuperSign CMS	SuperSign CMS	SuperSign CMS	SuperSign CMS
	Control and Monitoring Software	SuperSign Control / Control+	SuperSign Control / Control+	SuperSign Control / Control+	SuperSign Control / Control+
ACCESSORIES	Basic	Remote Controller (2ea Batteries Included), Power Cord, QSG, RGB Cable, Regulation Book, Phone to RS232C Gender, IR Receiver	Remote Controller (2ea Batteries Included), Power Cord, QSG, RGB Cable, Regulation Book, Phone to RS232C Gender, IR Receiver	Remote Controller (2ea Batteries Included), Power Cord, QSG, RGB Cable, Regulation Book, Phone to RS232C Gender, IR Receiver	Remote Controller (2ea Batteries Included), Power Cord, QSG, RGB Cable, Regulation Book, Phone to RS232C Gender, IR Receiver
	Optional	Stand (ST-492T), Media Player, Wall Bracket (LSW350B), VESA Adapter (AM-B330S), Wi-Fi Dongle (AN-WF500), Touch Overlay (KT-T55E)	Stand (ST-492T), Media Player, Wall Bracket (LSW350B), VESA Adapter (AM-B330S), Wi-Fi Dongle (AN-WF500), Touch Overlay (KT-T49E)	Stand (ST-432T), Media Player, Wall Bracket (LSW230B), VESA Adapter (AM-B220S), Wi-Fi Dongle (AN-WF500), Touch Overlay (KT-T43E)	Stand (ST-322T), Media Player, Wall Bracket (LSW230B), VESA Adapter (AM-B220S), Wi-Fi Dongle (AN-WF500), Touch Overlay (KT-T32E)
EAN		8806098290352	8806098290338	8806098290314	8806098290246

Conessioni


55SE3KE \ 49SE3KE \ 43SE3KE \ 32SE3KE




- ❶ RS-232C IN
- ❷ RS-232C OUT
- ❸ HDMI IN 1
- ❹ HDMI IN 2
- ❺ AUDIO OUT
- ❻ EXT IR IN
- ❼ DVI-D IN
- ❽ RGB IN
- ❾ LAN
- ❿ AUDIO IN
- ⓫ USB

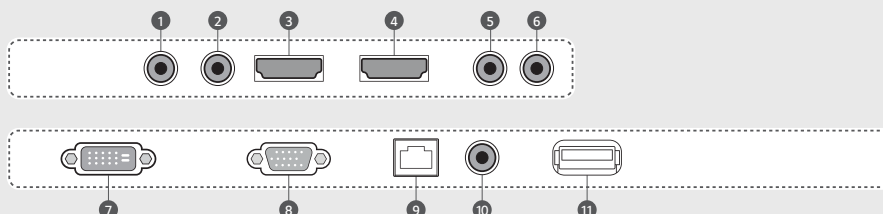


55"

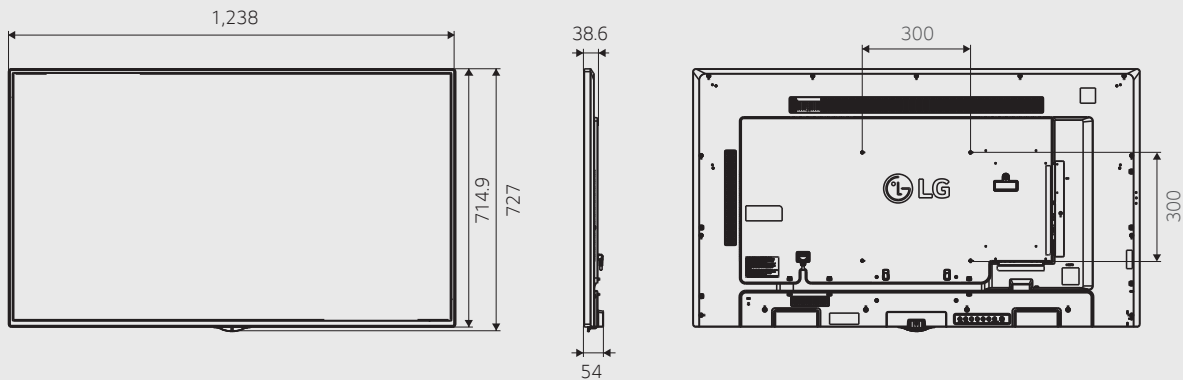

49"

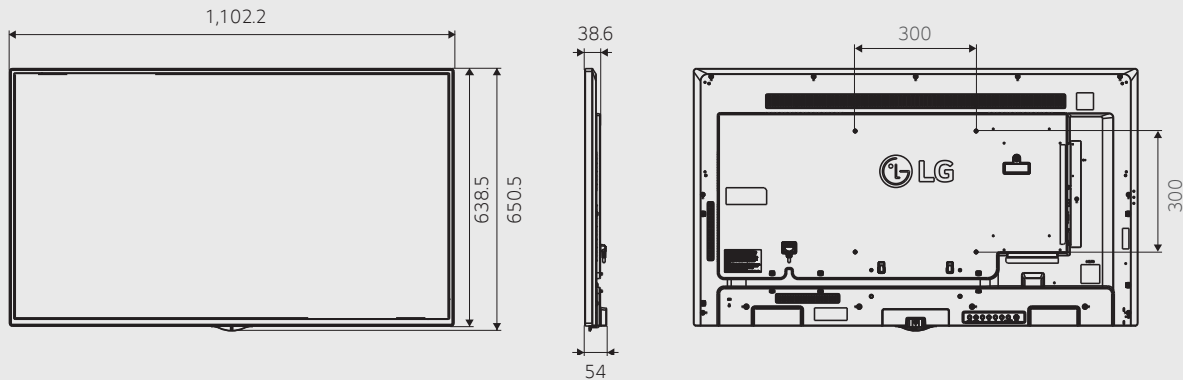

43"

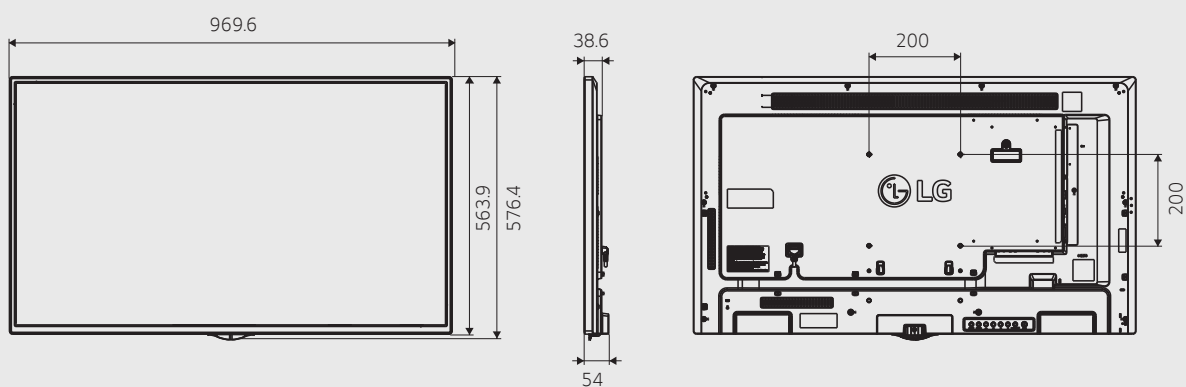

32"

