


55EF5DE		
PANEL	Screen Size	55"
	Panel Technology	OLED
	Aspect Ratio	16 : 9
	Native Resolution	1,920 x 1,080 (FHD)
	Brightness	400/150 cd/m² (APL* 25%/100%)
	Contrast Ratio	150,000 : 1
	Viewing Angle (H x V)	178 x 178
	Life time (Typ.)	30,000 Hrs
	Operation Hours	18 Hrs / 7 Days (Moving Video Only)
	Orientation	Landscape & Portrait
CONNECTIVITY	Input	HDMI, DP, USB 3.0
	Output	DP, Audio
	External Control	RS232C In/out, RJ45 In/out, IR In
PHYSICAL SPECIFICATION	Bezel Color	Black
	Bezel Width (On-Bezel)	Landscape: 5.2 / 10.6 / 7.6 / 7.6 mm, Portrait: 5.0 / 5.0 / 7.8 / 13.2 mm
	Monitor Dimension (W x H x D)	Landscape: 1,224.9 x 696.2 x 31.5 mm (0R, Flat, Display Only) 1,224.9 x 696.2 x 93.1 mm (0R Flat, Set**) 1,209.5 x 696.2 x 196.5 mm (2,000R Concave, Set) 1,209.7 x 696.2 x 157.8 mm (2,000R Convex, Set)
		Portrait: 701.4 x 1,219.7 x 31.5 mm (0R Flat, Display Only) 701.4 x 1,219.7 x 93.1 mm (0R Flat, Set) 697.8 x 1,219.7 x 134 mm (1,500R Concave, Set) 698 x 1,219.7 x 92 mm (1,500R Concave, Set)
	Weight	Landscape / Portrait: 14 kg (Set)
SPECIAL FEATURES	Carton Dimensions (W x H x D)	1,350 x 837 x 250 mm
	Packed Weight	Landscape / Portrait: 21 kg (Set)
		Internal Memory 64GB, Temperature Sensor, webOS3.0+, USB Auto Playback, Local Contents Scheduling, Group Manager, Fail Over, Video Tag (2), OSD Rotation, Content Rotation, Gapless Playback, Tile Mode Setting, Firmware Update by Network, SNMP, ISM Mode, Auto Set ID, Control Manager, HDMI-CEC***, SI Server Setting, webRTC
ENVIRONMENT CONDITIONS	Operation Temperature Range	0°C to 40°C
	Operation Humidity Range	10% to 80%
POWER	Power Supply	100-240V~, 50/60Hz
	Power Type	Built-In Power
	Power Consumption Typ. / Max.	230 W / 260 W
CERTIFICATION	Safety	UL / cUL / CB / TUV / KC
	EMC	FCC Class "A" / CE / KCC
	ErP / Energy Star	Yes / N/A
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	Yes
	External Media Player Attachable	Yes
SOFTWARE COMPATIBILITY	Content Management Software	SuperSign CMS
	Control and Monitoring Software	SuperSign Link
ACCESSORIES	Basic	Remote Controller (2ea Batteries Included), Power Cord, QSG, HDMI Cable (1M x 1ea for Connection Between T-con Box and Signage Box), Power Hanness Cable (1M x 1ea for Connection Between T-con Box and Signage Box), IR Receiver, Regulation Book, Phone to RS232C Gender, Jack Cover, Signage Box Mounting Bracket, FFC Cables (350mm x 4ea for Connection Between Panel and T-con Box), DP Cable, LAN Cable, LC (VLC Cable)
	Optional	Accessory Type1 (CaseTop / Bar): A3L****EF5E, A3P****EF5E Accessory Type2 (Jig): A2L****EF5C, A2P****EF5C, OPS Kit (KT-OPSA)
EAN	TBD	

Connessioni



55"

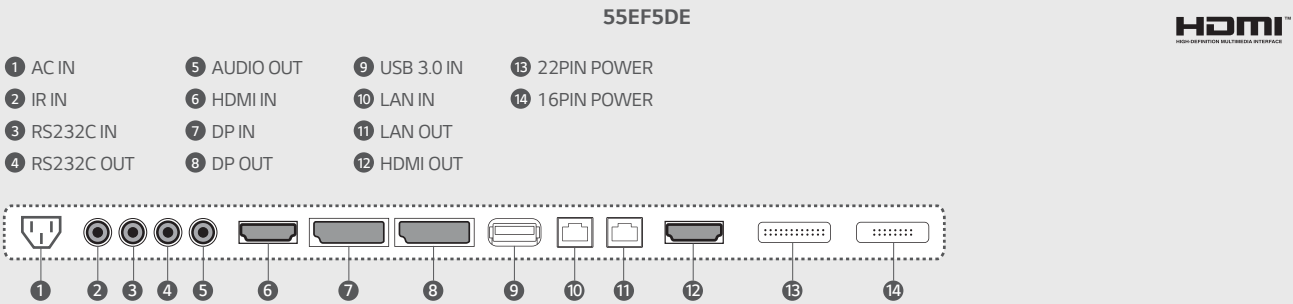