



		75XE3C	49XEB3E
PANEL	Screen Size	75"	49"
	Panel Technology	IPS	IPS
	Aspect Ratio	16 : 9	16 : 9
	Native Resolution	3,840 x 2,160 (UHD), M+ (WRGB)	1,920 x 1,080 (FHD), M+ (WRGB)
	Brightness*	3,000 cd/m ² (Typ.), 2,400 cd/m ² (min)	3,000 cd/m ² (Typ.), 2,400 cd/m ² (Min.)
	Viewing Angle (H x V)	178 x 178	178 x 178
	Response Time	8 ms (G to G BW, Typ.)	8 ms (G to G BW, Typ.)
	Surface Treatment	Hard Coating(2H), Anti-glare Treatment of the Front Polarizer (Haze 3% (Typ.)), QWP	Hard Coating (2H), Anti-reflection Treatment of the Front Polarizer (Haze 3% (Typ.)), QWP
	QWP Polarizer	Yes	Yes
	Life Time	50,000 Hrs	50,000 Hrs
	Operation Hours	24Hrs	24Hrs
	Orientation	Portrait only	Portrait Only
CONNECTIVITY	Input	HDMI, DP, DVI-D, Audio In, USB 3.0, SD Card	HDMI, DP, DVI-D, Audio In, USB 3.0
	Output	DP, External Speaker Out	DP, External Speaker Out
	External Control	RS232C In/out, RJ45 In	RS232C In/out, RJ45 In
PHYSICAL SPECIFICATION	Front glass	9.5 mm (AR, Tempered & Laminated Glass)	6.8 mm (AR, Tempered & Laminated Glass)
	Bezel Color	Black	Black
	Bezel Width	110 mm (T), 230 mm (B), 73.3 mm (L/R)	103.0 mm (T), 262.0 mm (B), 46.5 mm (L/R)
	Monitor Dimension (W x H x D)	1,075.6 x 1,991.6 x 218.9 mm	701 x 1,445 x 180.9 mm
	Weight (Head)	180 kg	58.6 kg
	Monitor with Optional Stand Dimensions (W x H x D)	1,075.6 x 2,361.6 x 218.9 mm	745 x 1,980 x 321 mm (TBD)
	Weight (Head+Stand)	247 kg	100 kg (TBD)
	Packing Dimensions (W x H x D)	1,292 x 2,296 x 468 mm	863 x 1,624 x 333 mm
	Packed Weight	210 kg	73.4 kg
SPECIAL FEATURES		Temperature Sensor, Auto Brightness Sensor, Pixel Sensor, Cooling FAN, ISM Method, DPM Select, Energy Saving, Smart Energy Saving, File Play with USB, Internal Memory 8GB (System 4GB + Available 4GB), USB Cloning, Easy Brightness Control, Wake on LAN, Fail Over, DP Daisy Chain, Control Manager	
ENVIRONMENT CONDITIONS	Operation Temperature	-30°C to 50°C	-30°C to 50°C
	Operation Humidity	5% to 100%	5% to 100%
	Dust / Water Proofing	IP56	IP56
POWER	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type	Built-In Power	Built-In Power
	Power Consumption	Typ./Max	700 W / 1,000 W
		Smart Energy Saving	350 W
STANDARD (CERTIFICATION)	Safety	UL / cUL / CB	UL / cUL / CB
	EMC	FCC Class "A" / CE / KCC	FCC Class "A" / CE / KCC
SOFTWARE COMPATIBILITY	Content Management Software	SuperSign CMS	SuperSign CMS
	Control and Monitoring Software	SuperSign C	SuperSign Link
ACCESSORIES	Basic	Remote Controller, Manual (EIG, ESG), Regulation Book, Phone to RS232C Gender, USB Cable, HDMI Cable	Remote Controller, Manual (EIG, ESG), Regulation Book, Phone to RS232C Gender, USB Cable, HDMI Cable
	Optional	Enclosure Stand (ST-750X)	Enclosure Stand (ST-491X, ST-493X), Circuit Breaker & Surge Suppressor (KT-PS)

75"

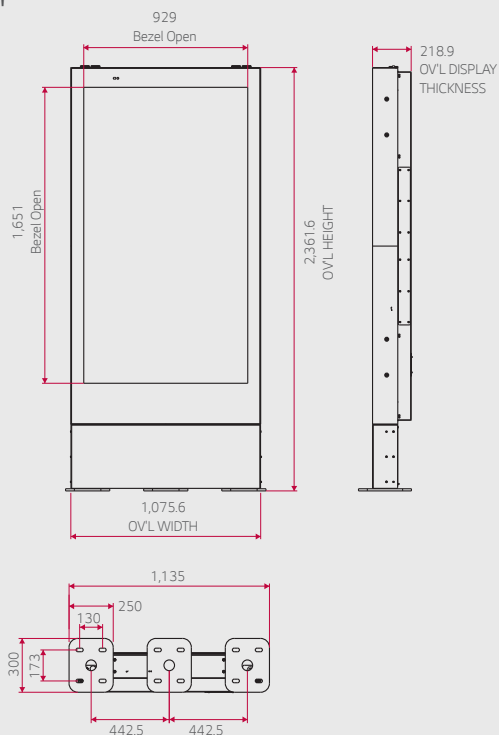

49"

(1 x 1)

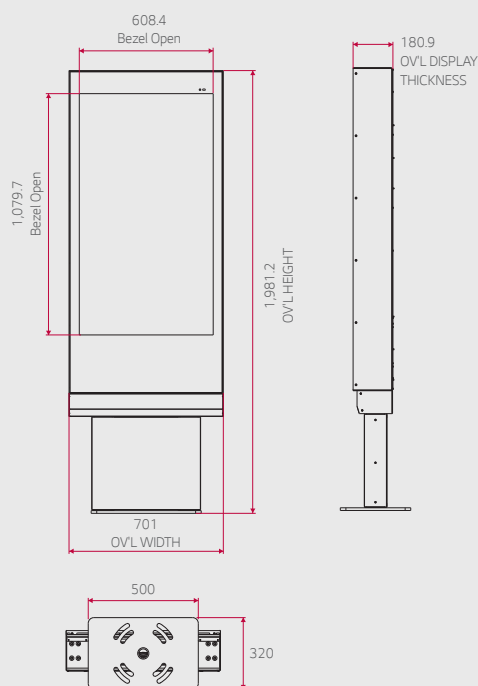

(1 x 3)

