



		75XE3C	55XE3C
PANEL	Screen Size	75" Class	55" Class (54.64" measured diagonal)
	Panel Technology	IPS	IPS
	Aspect Ratio	16:9	16:9
	Native Resolution	3,840 x 2,160 (UHD), M+	1,920 x 1,080 (FHD), M+
	Brightness	3,000cd/m ² (Typ.) 2,400cd/m ² (min) through front protective glass	3,000cd/m ² (Typ.) 2,400cd/m ² (min) through front protective glass
	Contrast Ratio	1,200:1	1,000:1
	Viewing Angle (H x V)	178 x 178	178 x 178
	Response Time	8 ms (Typ.) (G to G BW)	9 ms (Typ.) (G to G BW)
	Surface Treatment	Hard coating (2H), Anti-glare treatment of the front polarizer (Haze 3% (Typ.))	Hard coating (2H), Anti-reflection treatment of the front polarizer (Reflectance 1.5%)
	QWP Polarizer (FPR Film)	Yes	Yes
	Local dimming	48 Block	160 Block
	Orientation	Portrait only	Portrait & Landscape
CONNECTIVITY	Input	HDMI, DP, DVI-D, Audio	
	Output	DP, External Speaker (*waterproof speakers are mandatory for outdoor installation)	
	External Control	RS232C, RJ45, SD Card, USB 3.0	
PHYSICAL SPECIFICATION	Front glass	9.5 mm (AR, Front Safety Vandal Glass)	7.5 mm (AR, Front Safety Vandal Glass)
	Bezel Color	Medium Texture Black (Common color)	Medium Texture Black (Common color)
	Bezel Width	110 mm (T), 230 mm (B), 73.3.0 mm (L/R)	66.4 mm (T/B), 31.0 mm (L/R)
	Monitor Dimension (W x H x D)	1,075.6 x 1,991.6 x 218.9 mm	745.3 x 1,345.4 x 160.0 mm
	Weight (Head)	180 kg	70 kg
	Monitor with Optional Stand Dimensions (W x H x D)	1,075.6 x 2,361.6 x 218.9 mm	745 x 542 x 420 mm (option)
	Weight (Head+Stand)	240 kg	100.5 kg
	Packing Dimensions (W x H x D)	1,308 x 2,296 x 468 mm	1,027 x 1,491 x 309 mm
	Packed Weight	15 kg (TBD)	EPS Packing + Cartoon Box
	Handle	Option (I-Bolt)	Option (I-Bolt)
SPECIAL FEATURES		Temperature Sensor, Tile Mode, Natural Mode@Tile Mode, Auto-Brightness Sensor, Pixel Sensor, Cooling Fan, ISM Method, DPM Select, Energy Saving, Smart Energy Saving, File Play with USB, Internal Memory (8 GB), Easy Brightness Control, Content Scheduling, Fail over, DP daisy chain	
ENVIRONMENT CONDITIONS	Operation Temperature	-30 °C to 50 °C	-30 °C to 50 °C
	Operation Humidity	5 % to 100 %	5 % to 100 %
	Direct Sunlight	Yes	Yes
	Dust / Water Proofing	IP 56	IP 56
POWER	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type	Built-In Power	Built-In Power
	Power Consumption	Typ./ Max	700 W / 1,000 W
		Smart Energy Saving	350 W / 178 W
STANDARD (CERTIFICATION)	Safety	UL / cUL / CB	UL / cUL / CB
	EMC	FCC Class "A" / CE / KCC	FCC Class "A" / CE / KCC
	ErP / Energy Star	No / No	No / No
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	No	No
	External Media player Attachable	No	No
SOFTWARE COMPATIBILITY	SuperSign W/Lite	Yes	Yes
	SuperSign C	Yes	Yes
ACCESSORIES	Basic	Remote controller, EIG, ESG, Regulation book, Phone to RS232C gender, USB cable, HDMI cable	Remote controller, EIG, ESG, Regulation book, Phone to RS232C gender, USB cable, HDMI cable
	Optional	Media player (driven by customer), Enclosure Stand (ST-750X)	Media player (driven by customer), Enclosure Stand (ST-550X)
EAN		8806087857382	8806087857337

75"


(Monitor Top)




(Monitor Bottom)




(Stand Bottom)




(Monitor Side)

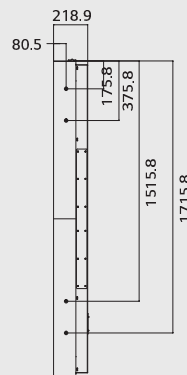

(Stand Front)

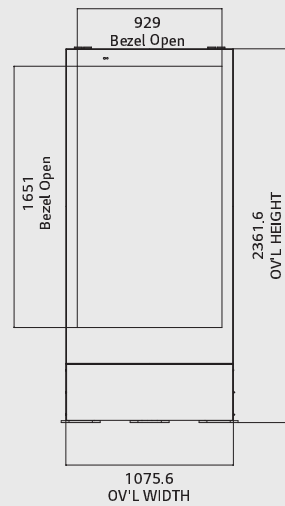


(Stand Side)

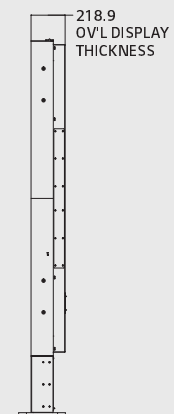


55"


(Monitor Top)



(Monitor Bottom)




(Stand Bottom)



(Monitor Side)



(Stand Front)

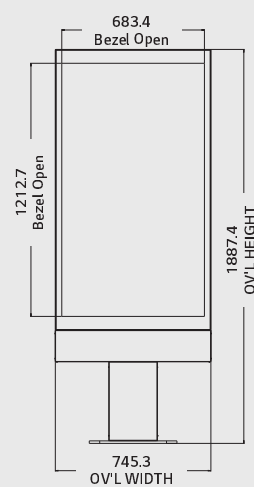

(Stand Side)

