


		86XE3FS
PANEL	Screen Size	86"
	Panel Technology	IPS
	Aspect Ratio	16 : 9
	Native Resolution	3,840 x 2,160 (UHD)
	Brightness	3,000 cd/m ² (Typ.), 2,800 cd/m ² (Min.)
	Contrast Ratio	1,200:1 (Typ)
	Viewing Angle (H x V)	178 x 178
	Response Time	8 ms (GTG Typ.)
	Surface Treatment (Haze)	AGLR (3%), QWP
	Life Time (Typ.)	50000 Hrs
	Operation Hours	24 Hrs
	Orientation	Portrait
CONNECTIVITY	Input	HDMI, DP, DVI-D, Audio, USB
	Output	External Speaker
	External Control	RS232C In/out, RJ45(LAN) In, RJ45(LAN) Out(4), External IR In
MECHANICAL SPECIFICATION	Front Glass	Yes
	Bezel Color	Black
	Bezel Width	101 mm (T/B), 135 mm (L/R)
	Monitor Dimension (W x H x D)	1,338 x 2,100 x 187 mm
	Weight (Head)	276 kg
	Carton Dimensions (W x H x D)	1,503 x 2,296 x 468 mm
	Packed Weight	310 kg
KEY FEATURE		Internal Memory 8GB (System 4GB + Available 4GB), Temperature Sensor, Auto Brightness Sensor, BLU Brightness Sensor, Pixel Sensor, Gyro Sensor, Current Sensor, FAN (12), Embedded CMS, Fail Over, Image Customization, Content Sync, Play via URL, Gapless Playback, Tile Mode Setting (Up to 15x15), DPM, Smart Energy Saving, Wake on LAN (Wired), Firmware Update by Network, Control Manager, Status Mailing, SI Server Setting
ENVIRONMENT CONDITIONS	Operation Temperature	-30°C to 50°C
	Operation Humidity	5% to 100%
POWER	Power Supply	100-240V~, 50/60Hz
	Power Type	Built-In Power
	Power Typ./Max.	1,450 W / 1,850 W
	Consumption Smart Energy Saving	650 W
CERTIFICATION	Safety	UL / cUL / CB
	EMC	FCC Class "A" / CE / KC
	ErP / Energy Star	Yes / No
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	No
	External Media Player Attachable	No
SOFTWARE COMPATIBILITY	Content Management Software	SuperSign CMS
	Control and Monitoring Software	SuperSign Control/Control+
ACCESSORIES	Basic	Remote Controller, HDMI Cable, USB Cable, Manual (ESG&EIG), Regulation Book, Phone to RS232C Gender, LAN Extension Cable, Cord Grip Rubbers

Connessioni



86"

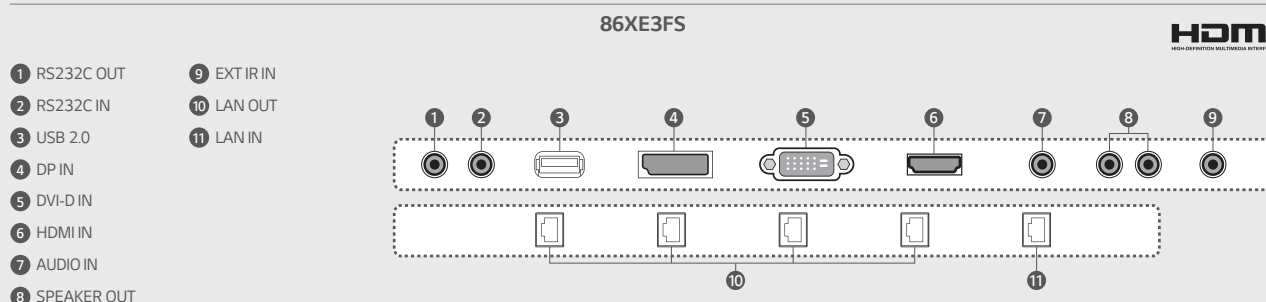