


		49XS1D
PANEL	Screen Size	49"
	Panel Technology	IPS, M+ (WRGB)
	Aspect Ratio	16:9
	Native Resolution	1,920 x 1,080 (FHD)
	Brightness	1,500cd/m ² (Typ.), 1,200cd/m ² (Min.)
	Contrast Ratio	1,300:1 (TBD)
	Dynamic CR	500,000:1
	Viewing Angle (H x V)	178 x 178
	Surface Treatment	AGLR (Haze 3%), QWP
CONNECTIVITY	Orientation	Landscape & Portrait
	Input	HDMI(2), DP, DVI-D, Audio, USB
	Output	DP, External Speaker Out (L/R)
PHYSICAL SPECIFICATION	External Control	RS232C In/Out, RJ45, IR Receiver, Pixel Sensor
	Bezel Color	Black
	Bezel Width	7.4 mm (even bezel)
	Monitor Dimension (W x H x D)	1,095 x 637 x 32 mm
	Weight (Head)	15.6 kg
	Carton Dimensions (W x H x D)	1,197 x 760 x 134 mm
	Packed Weight	18.7 kg
	VESA™ Standard Mount Interface	400 x 400 mm
SPECIAL FEATURES		Temperature sensor, Auto brightness sensor (except 75XS2C), Tile mode (Up to 15x15), Natural mode@Tile mode, Source selection, Brightness/Contrast/Backlight, DPM select, Energy saving, Smart energy saving, File play with USB, Internal memory, Wi-Fi dongle ready
ENVIRONMENT CONDITIONS	Operation Temperature Range	0°C to 40°C (w/o Direct sunlight) - 0°C to 30°C (Direct sunlight)
	Operation Humidity Range	10% to 80%
POWER	Power Supply	100-240 V~, 50/60 Hz
	Power Type	Built-In Power
	Power Consumption Typ./Max	130 W (TBD) / 150 W (TBD)
	Smart Energy Saving	90 W (TBD)
STANDARD (CERTIFICATION)	Safety	UL / cUL / CB / TUV / KC (TBD)
	EMC	FCC Class "A" / CE / KCC
SOFTWARE COMPATIBILITY	SuperSign W/Lite	Yes
	SuperSign C	Yes
ACCESSORIES	Accessories	Remote controller (including battery 2ea), Power cord, IR/Light sensor receiver, QSG, Regular book (depend on regional standard), HDMI cable
	Optional Accessories	SP-2100 (External Speaker), ST-200T, LSW440S, AN-WF500, KT-OPSA, KT-SP0
EAN		8806087415223

Connessioni

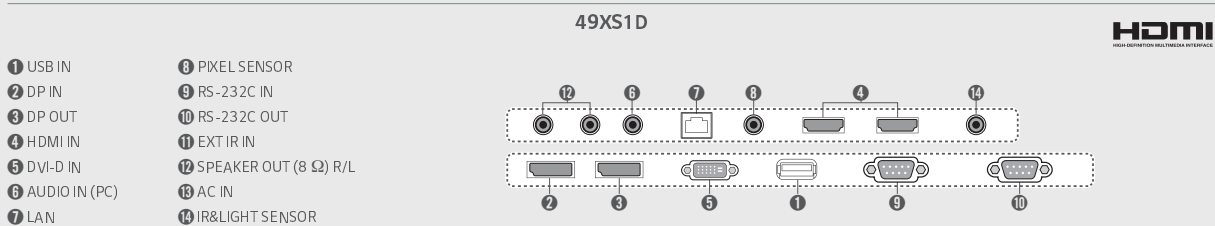

Disegno Tecnico

49"

1,092.7 x 626.4 x 83.5 /

21.2kg

