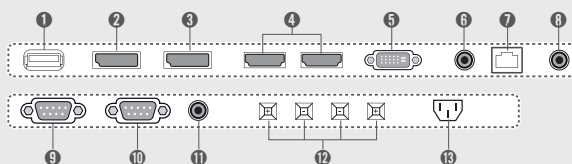


		49XS2B
PANEL	Screen Size	49"
	Panel Technology	IPS
	Aspect Ratio	16 : 9
	Native Resolution	1,920 x 1,080 (FHD)
	Brightness	2,750cd/m ² (Max), 2,250cd/m ² (Min), 2,500cd/m ² (Typ.)
	Contrast Ratio	1,000:1
	Dynamic CR	500,000:1
	Viewing Angle (H x V)	178 x 178
	Surface Treatment	Hard Coating(2H), Anti-Glare Treatment of the Front Polarizer (Reflectance < 2%)
CONNECTIVITY	Life time	50,000 Hrs
	Orientation	Portrait & Landscape
	Input	HDMI(2), DP, DVI-D, Audio, USB, IR Receiver, Pixel Sensor
	Output	DP, External Speaker Out (L/R)
PHYSICAL SPECIFICATION	External Control	RS232C (In/Out), RJ45
	Bezel Color	Black
	Bezel Width	6.5mm(L/R), 9mm(T/B)
	Monitor Dimension (W x H x D)	1,092.7 x 626.4 x 83.5mm
	Weight (Head)	21.2kg
	Carton Dimensions (W x H x D)	1,194 x 175 x 760mm
	Packed Weight	25.7kg
SPECIAL FEATURES	VESA™ Standard Mount Interface	600 x 400mm
		Temperature Sensor, Auto Brightness sensor, Tile Mode, Natural Mode @Tile Mode, Source Selection, Brightness/Contrast/Backlight
ENVIRONMENT CONDITIONS	Operation Temperature Range	0 °C to 45 °C (w/o Direct Sunlight)
	Operation Humidity Range	0 °C to 35 °C (Direct Sunlight)
		10 % to 80 %
POWER	Power Supply	100-240V~, 50/60Hz
	Power Type	Built-In Power
	Power Consumption Typ./Max	190W / 210W
	Smart Energy Saving	85W
STANDARD (CERTIFICATION)	Safety	RU / CB scheme
	EMC	FCC Class "A" / CE / KCC
SOFTWARE COMPATIBILITY	SuperSign W/Lite	Yes
	SuperSign C	Yes
ACCESSORY	Accessory	Remote Controller (2 batteries included), Power Cord, HDMI Cable, Manual (ESG&EIG)
	Optional Accessory	WM-L640V, WM-P640V(Wall Mount), KT-SP0, AN-WF500 ** Stand is not available
EAN		8806087536386

Connessioni

- 1 USB IN
- 2 DP IN
- 3 DP OUT
- 4 HDMI IN
- 5 DVI-D IN
- 6 AUDIO IN (PC)
- 7 LAN
- 8 PIXEL SENSOR
- 9 RS-232C IN
- 10 RS-232C OUT
- 11 EXT IR IN
- 12 SPEAKER OUT (8Ω) R/L
- 13 AC IN

49XS2B


HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE

Disegno Tecnico

49"

1,092.7 x 626.4 x 83.5 /

21.2kg

